

PREVOST

Instruction Sheet

IS-00034

INSTALLATION GUIDE FOR 40 OHMS RESISTOR USED WITH 12 VOLTS LICENSE PLATE ILLUMINATING LAMP

MATERIAL

Kit #065356 includes the following parts :

Part No.	Description	Qty
930266	12 volts illuminating lamp	1
065355	40 ohms resistor	1
500798	Screw, tp pan hd zp #4-3/8	2
IS-00034	Instruction Sheet	1
FI-00034	Feuille d'instructions	1

PROCEDURE

Warning : Park vehicle safely, apply parking brake, stop engine and set battery master switch(es) to the OFF position prior to working on the vehicle.

1. Insert the 12 volts lamp in the rubber housing.
2. Locate the white electric lead routing out of the engine compartment door. It is ended by a ring terminal and bolted on the door frame.
3. Cut the lead and remove a part of its sleeve at each end.
4. Using pliers, crimp each end to the butt splice on the resistor assembly.
5. Temporary fix the resistor and mark on the rough drilling position.
6. With the use of a 3/32" diameter drill, make a rough drilling.
7. Screw on the resistor assembly.

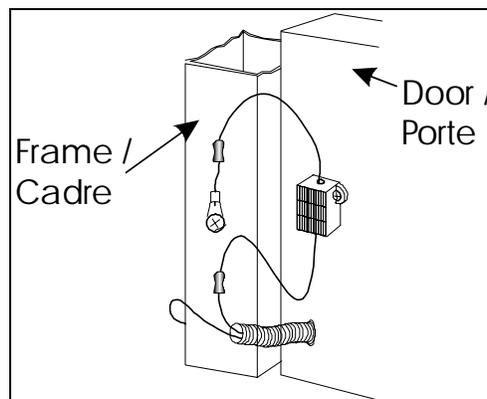


FIGURE 1 : VIEW OF THE INSTALLATION