



**MAINTENANCE
INFORMATION**

MI23-03

DATE :	May 2023	SECTION :	18 BODY
SUBJECT :	DASHBOARD PROCEDURE	COVERS	REMOVAL

First Release

05-31-2023

APPLICATION

Model	VIN	
H3-45 coaches Model Year: 2024 - ...	From 2PCH3349X <u>RC721453</u>	
H3-45 VIP motorhomes Model Year: 2023 - ...	From 2PCVS3499 <u>PC721348</u>	

DESCRIPTION

Perform the following procedure to remove the dashboard covers. Reinstallation is similar to removal but in reverse order.

[Table of contents](#)

SAFETY PRECAUTIONS..... 2

PART 1 - INSTRUMENT PANEL COVER REMOVAL..... 3

PART 2 - DASHBOARD COVER REMOVAL 5

PART 3 - RIGHT SIDE OF THE DASHBOARD – ACCESS PANEL REMOVAL..... 7

PART 4 - RIGHT SIDE OF DASHBOARD REMOVAL..... 9

SAFETY PRECAUTIONS

- Eye protection should always be worn when working in a shop.
- Rules for Personal Protection Equipment should always be respected. Wear your PPE including but not limited to the following:



Safety First!



DANGER

Park vehicle safely, apply parking brake, stop the engine. Prior to working on the vehicle, set the ignition switch to the OFF position and trip the main circuit breakers equipped with a trip button. On Commuter type vehicles, set the battery master switch (master cut-out) to the OFF position.

Lockout & Tag out (LOTO) must be performed during set-up, maintenance or repair activities. Refer to your local procedure for detailed information regarding the control of hazardous energy.

PART 1 - INSTRUMENT PANEL COVER REMOVAL

1. From underneath the instrument panel cover, unscrew two (2) socket hex screws.

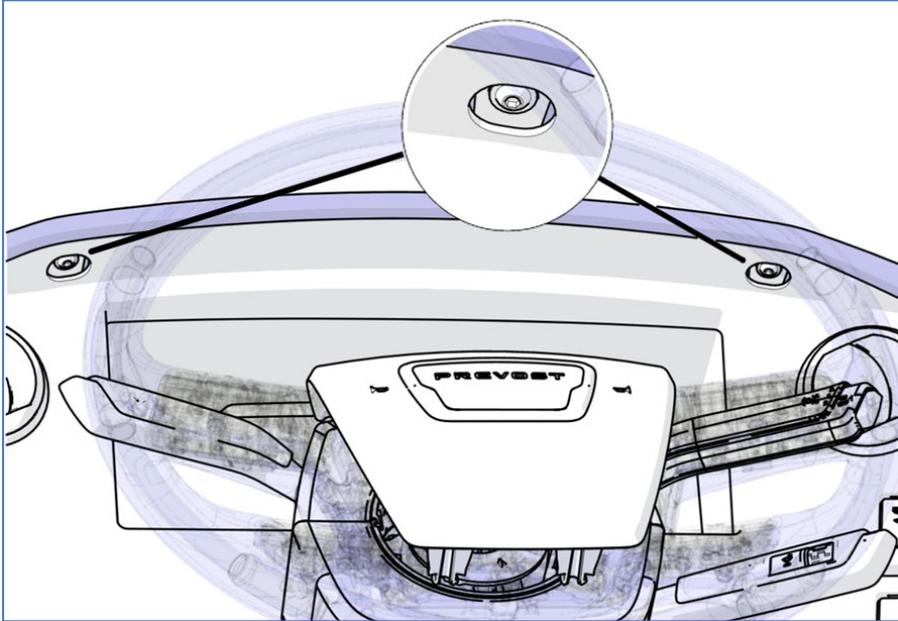


FIGURE 1

2. Look at the following image to understand how the instrument panel cover is held in place with flexible tabs close to the windshield.

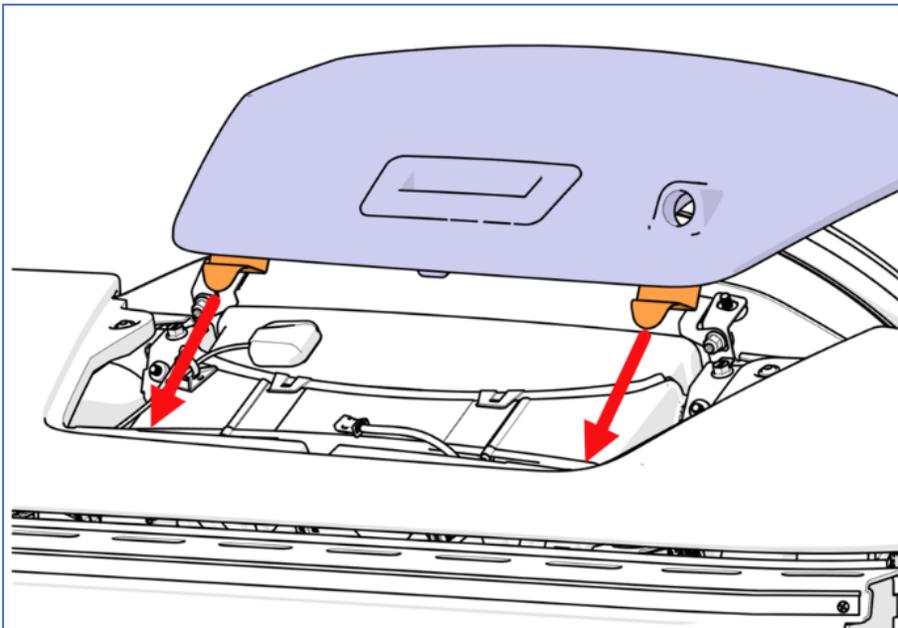


FIGURE 2

3. Lift the edge of the instrument panel cover with a light force then pull the cover toward you.

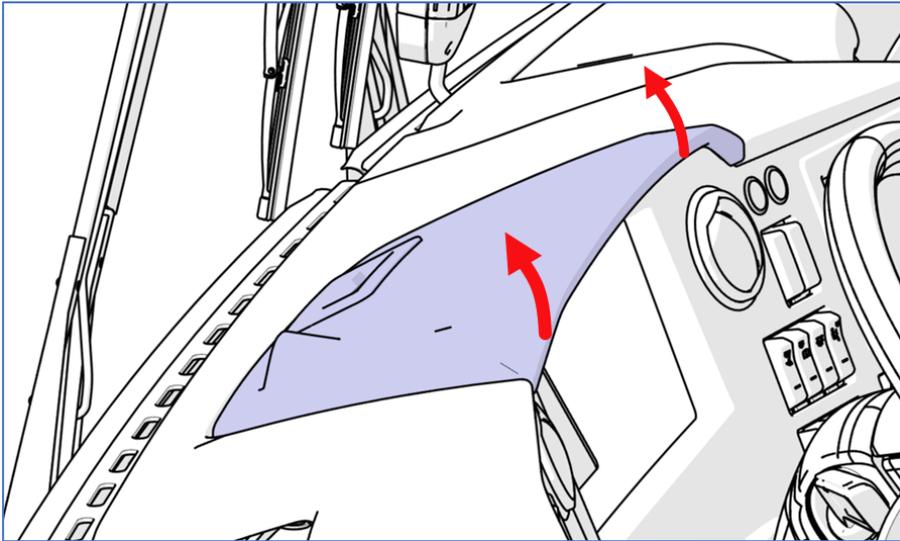


FIGURE 3

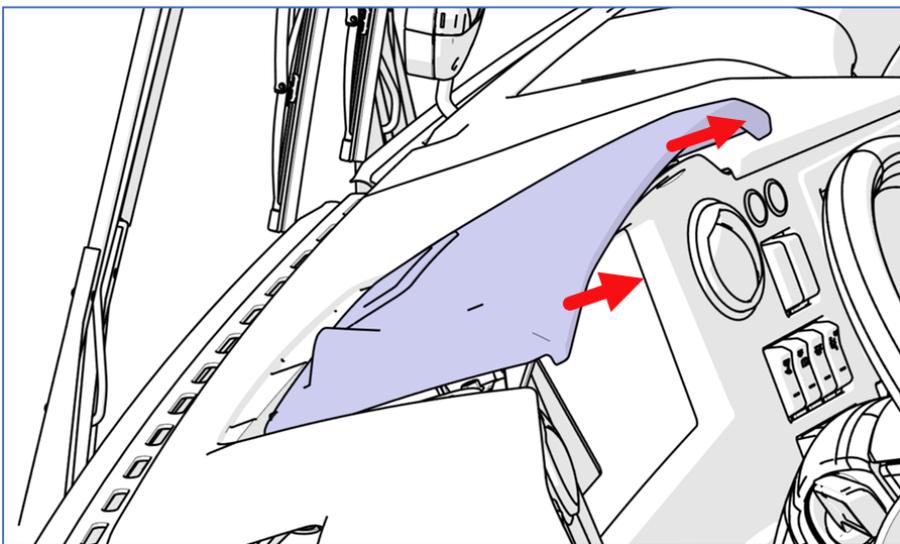


FIGURE 4

PART 2 - DASHBOARD COVER REMOVAL

1. Remove the three (3) screws shown on the image below.

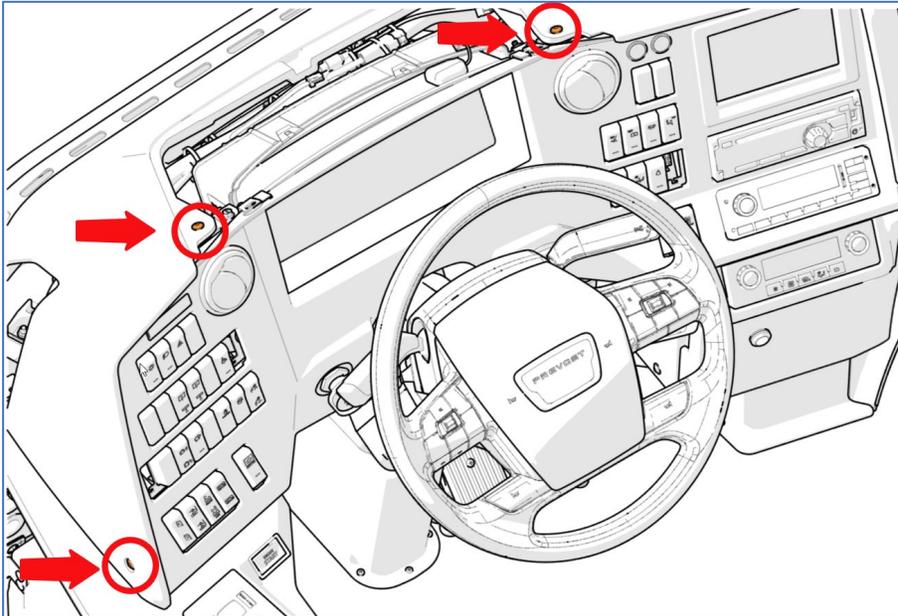


FIGURE 5

2. Unsnap the dashboard cover at the five (5) points identified on the image below.

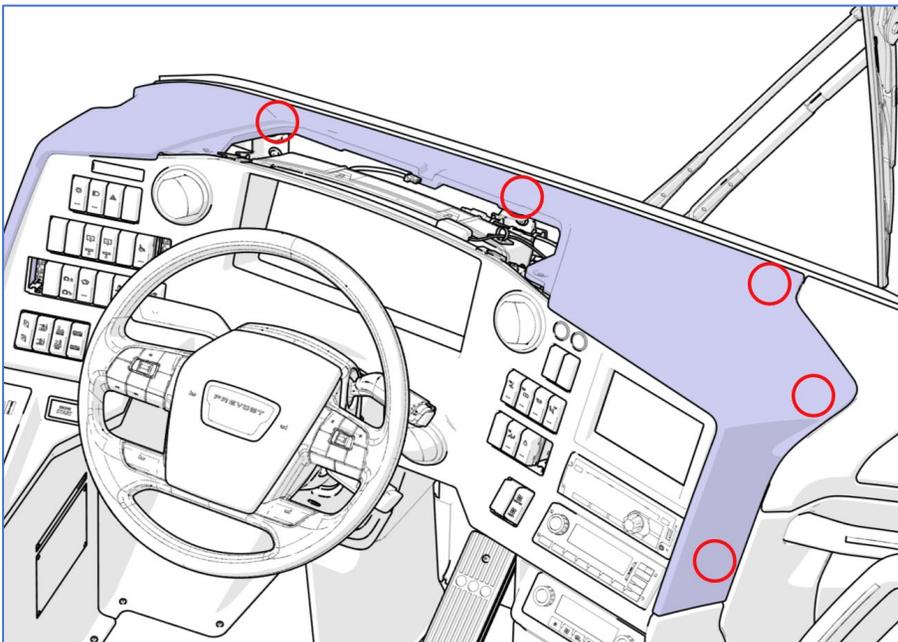


FIGURE 6

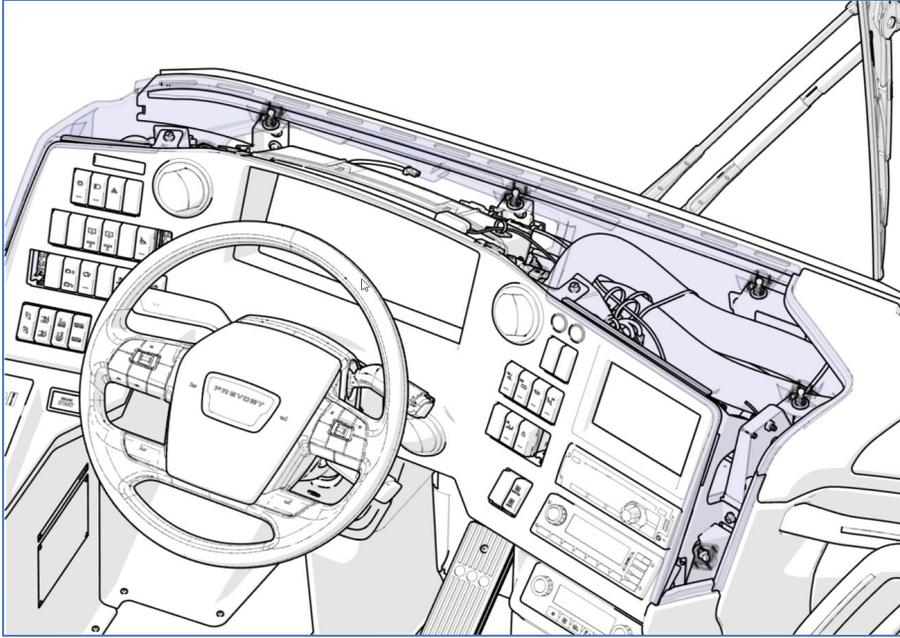


FIGURE 7

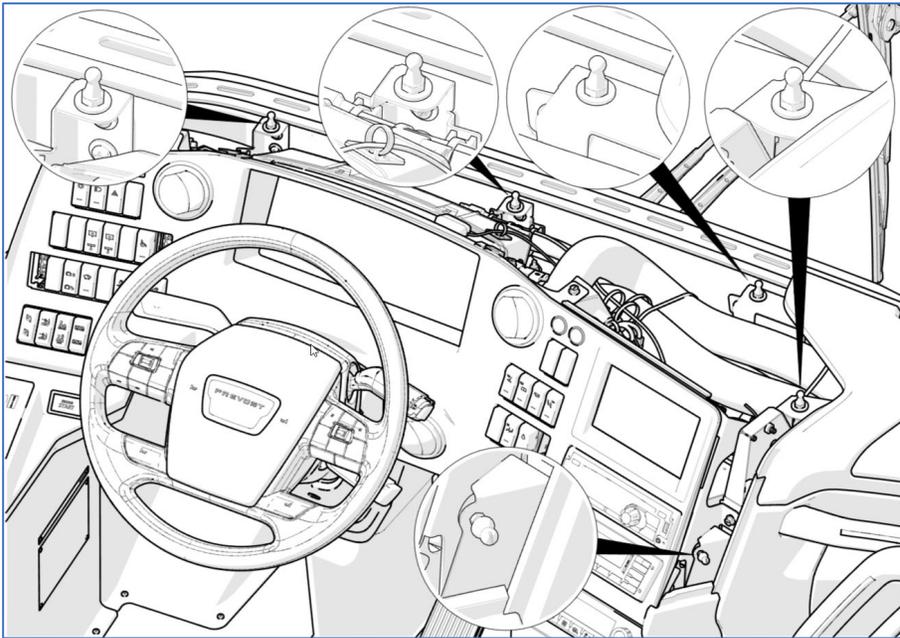


FIGURE 8

PART 3 - RIGHT SIDE OF THE DASHBOARD – ACCESS PANEL REMOVAL

1. The panel on the right side of the dashboard is secured with fasteners as seen on the images below.

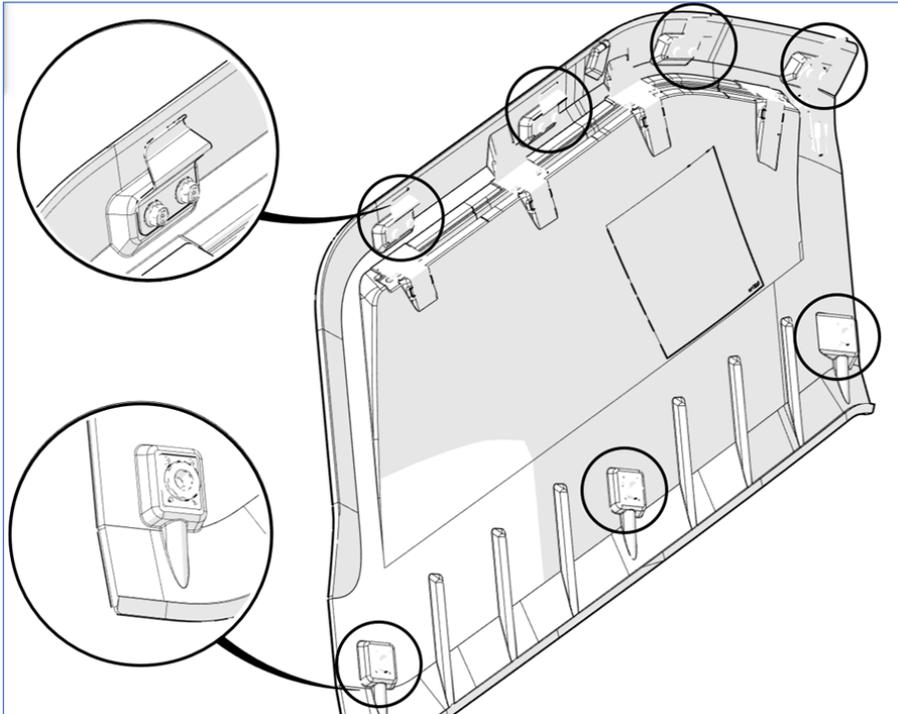


FIGURE 9: ATTACHMENT POINTS AT THE BACK OF THE PANEL

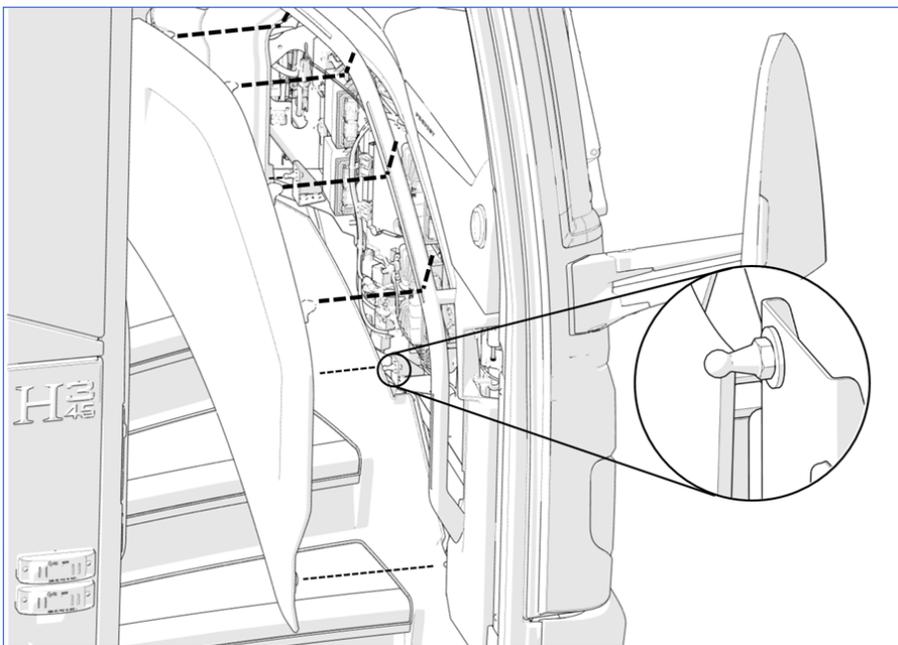


FIGURE 10

2. To remove the panel, pull (unsnap) the bottom of the panel in three (3) places by pulling toward you and then pull the panel down to disengage the top.

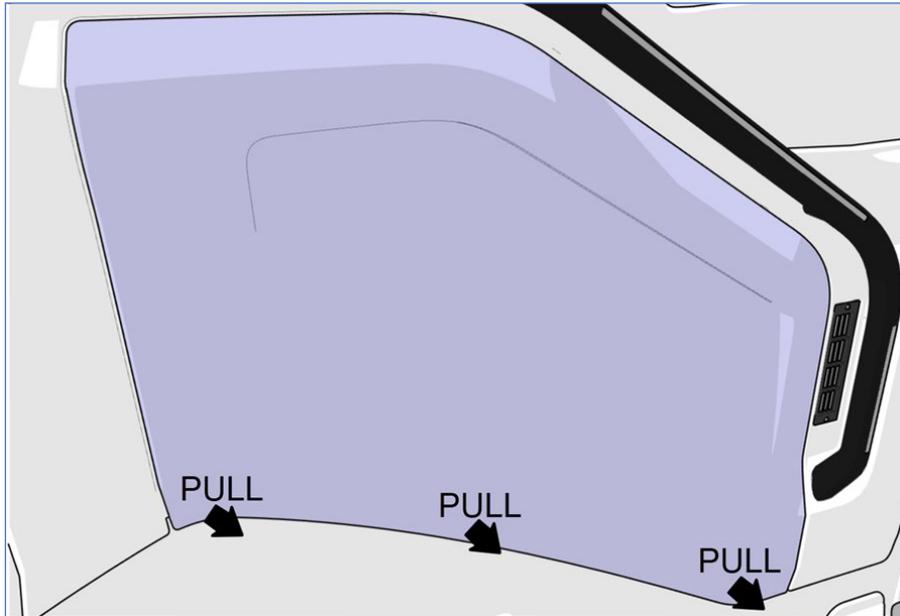


FIGURE 11

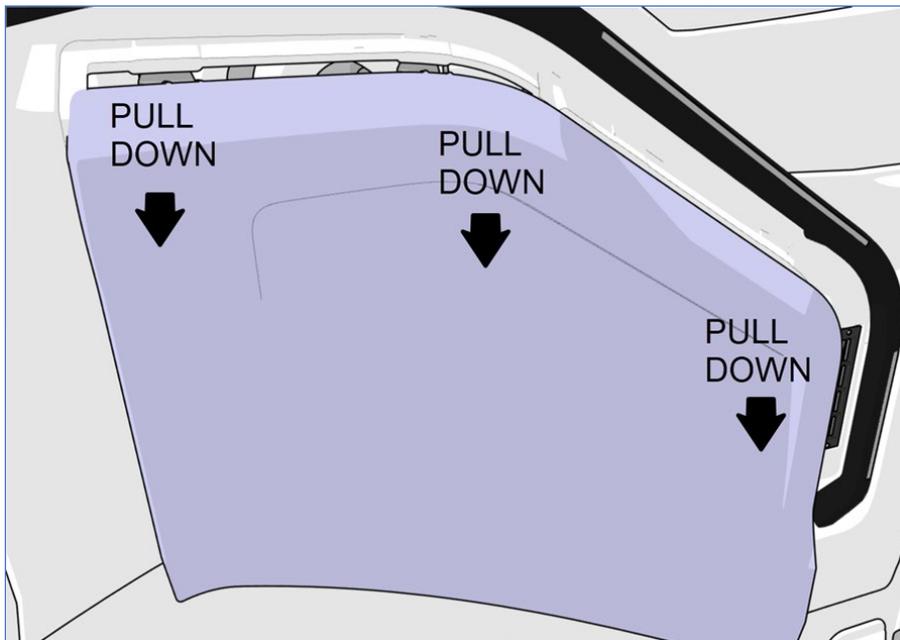


FIGURE 12

PART 4 - RIGHT SIDE OF DASHBOARD REMOVAL

1. Perform Part 1, 2 & 3.
2. Remove the three (3) screws shown on the image below.

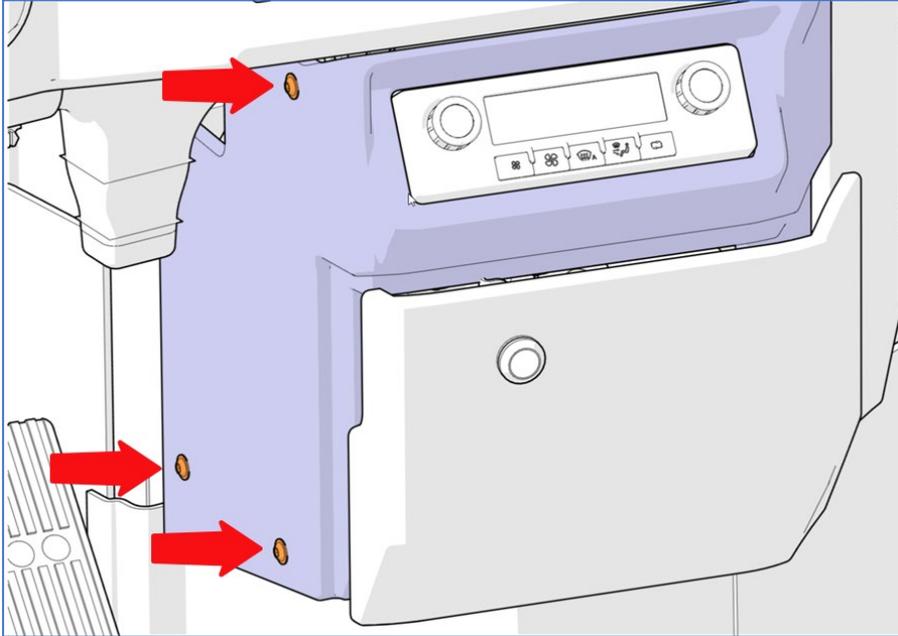


FIGURE 13

3. Remove the screw shown on the image below.

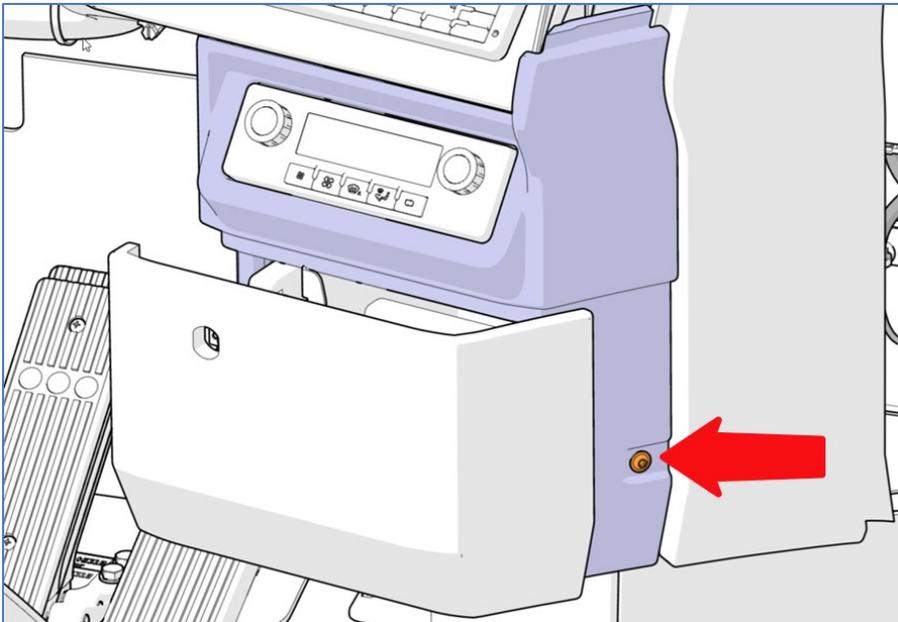


FIGURE 14

4. Open the utility compartment.

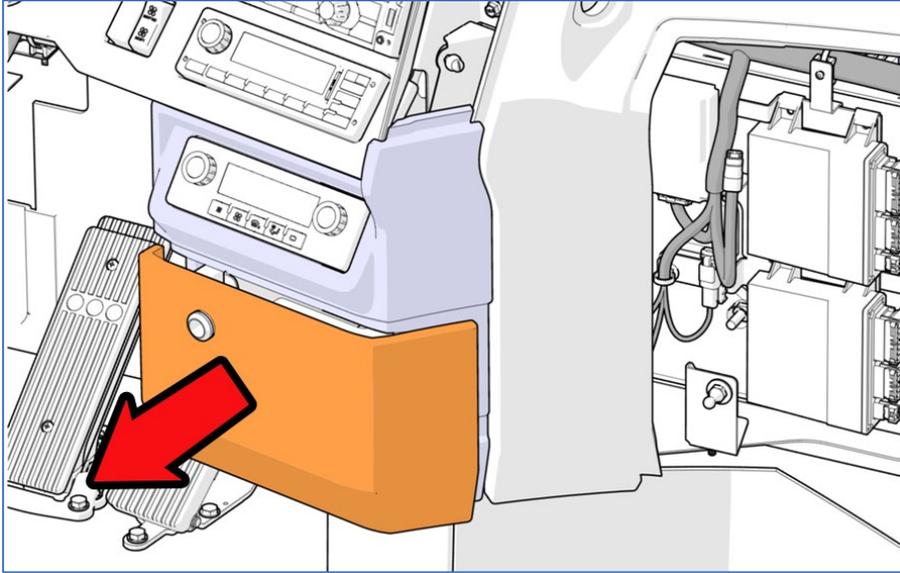


FIGURE 15

3. Unsnap the trim at the attachment point identified on the images below.

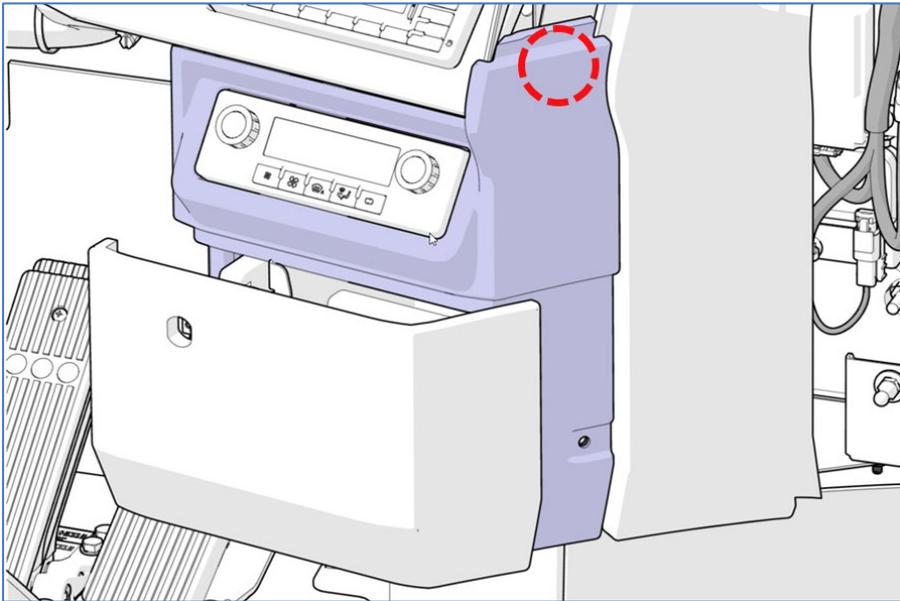


FIGURE 16

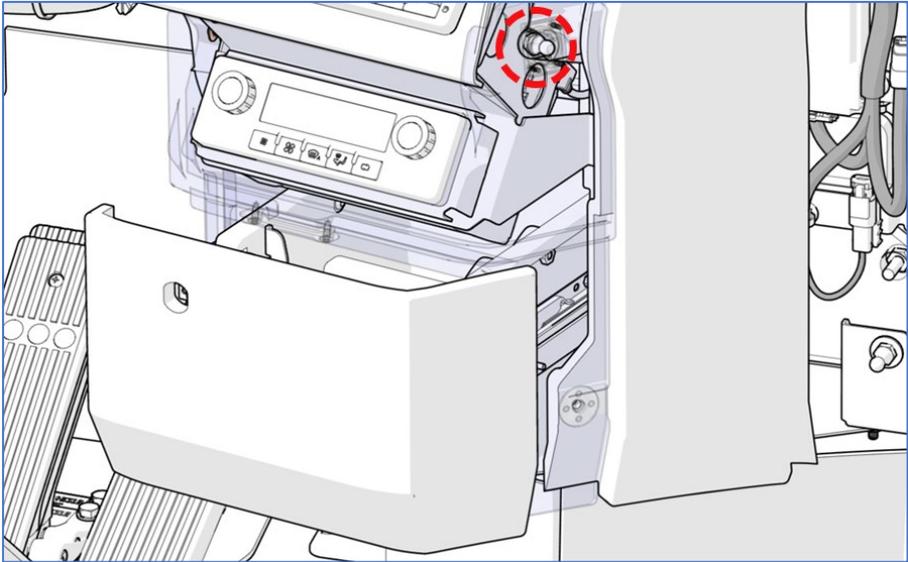


FIGURE 17

5. Pull the trim to uncover the circled area shown on the image below.

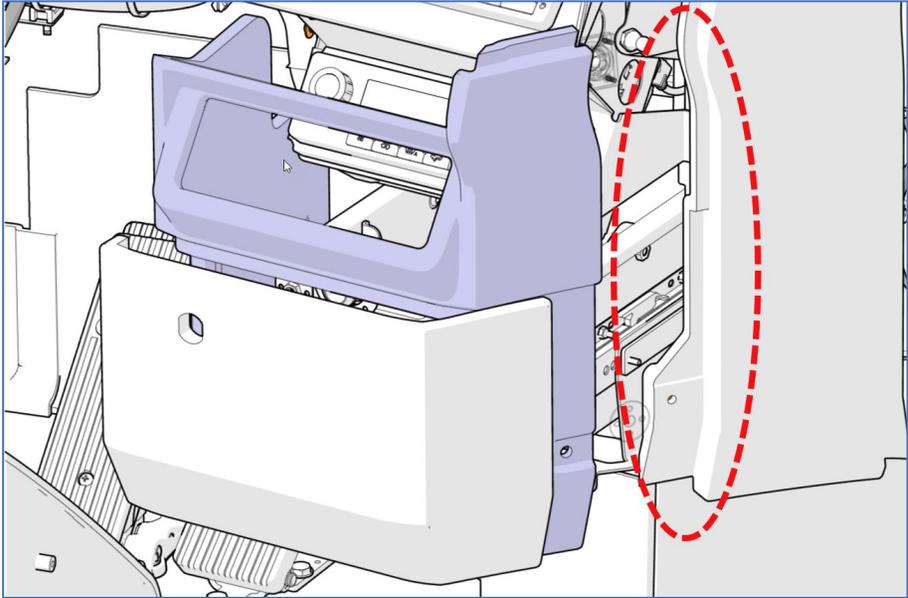


FIGURE 18

6. Disconnect the hose shown on the image below.

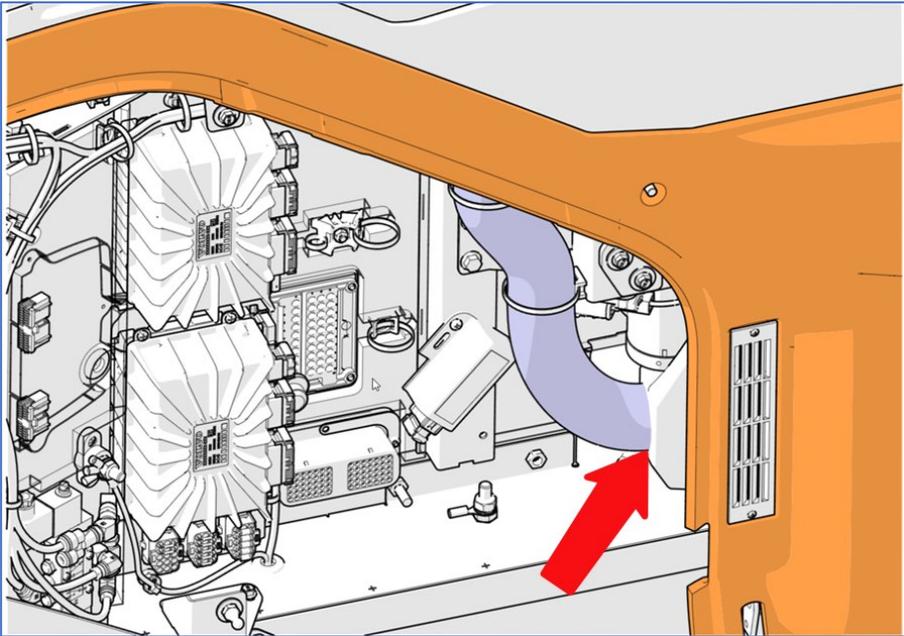


FIGURE 19

7. Remove the handrail. To do so, remove the three (3) cap screws shown on the image below.

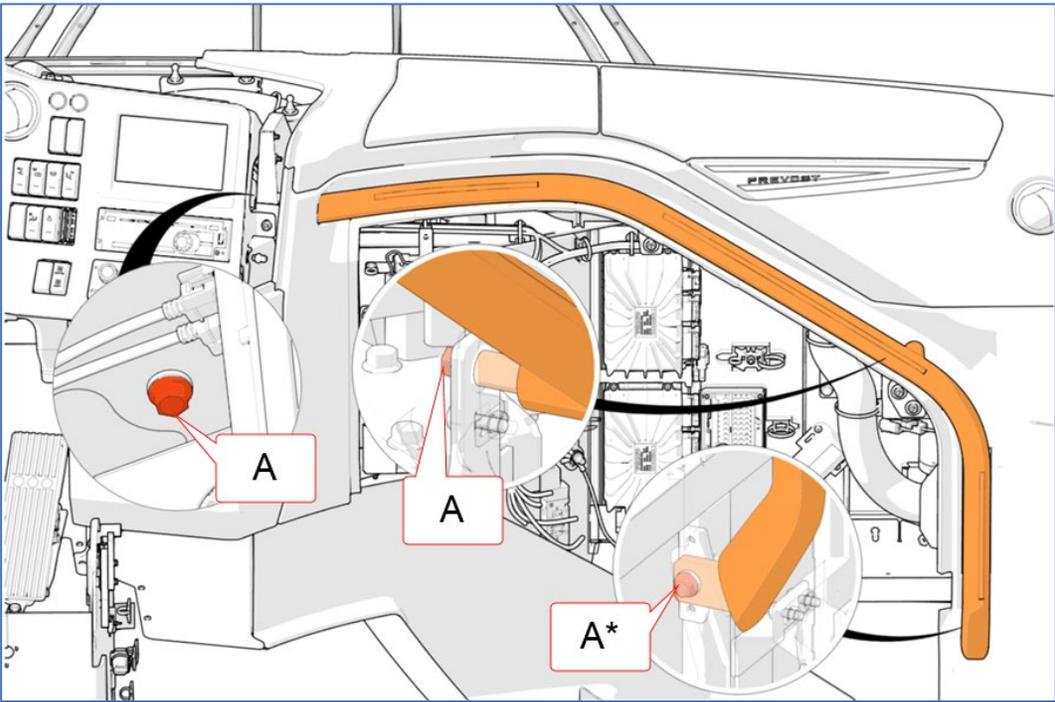


FIGURE 20

A= cap screw + washer TORQUE 14 lb-ft

A*= cap screw + washer + square plate TORQUE 14 lb-ft

8. Remove the panel shown on the image below. To do so, perform the following steps.

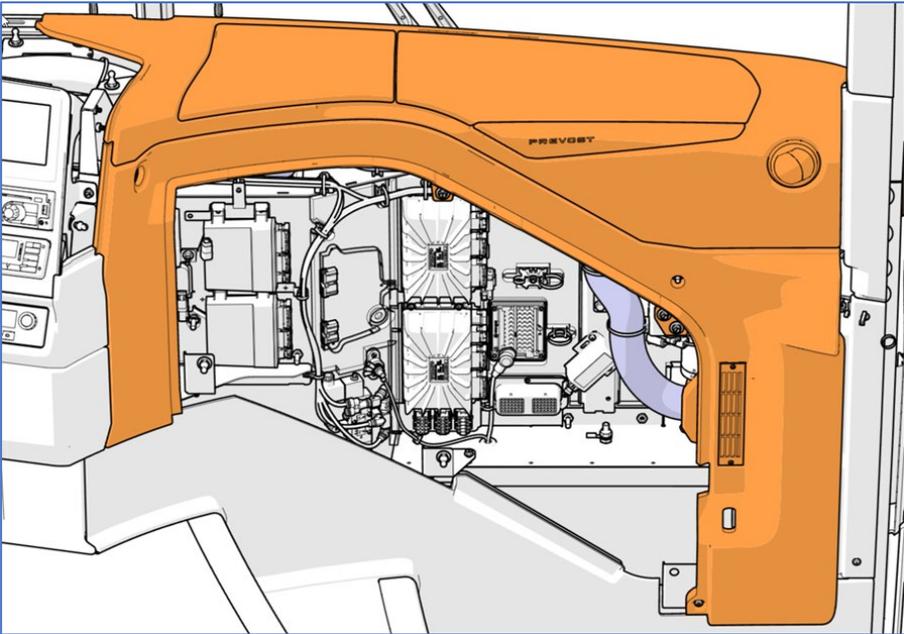


FIGURE 21

9. Remove the four (4) fasteners shown on the image below.

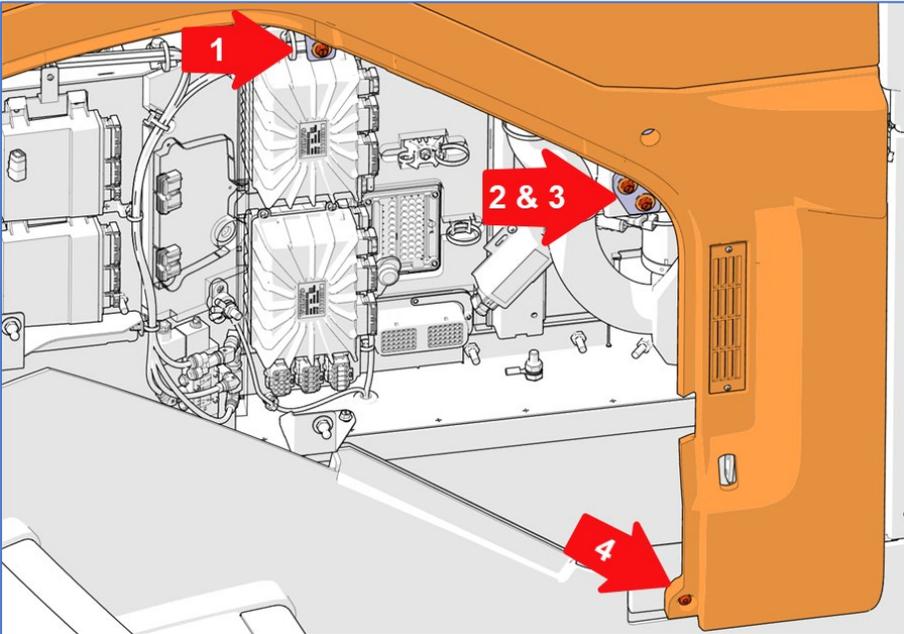


FIGURE 22

10. To remove the panel, first, remove the screw shown on the image below. **NOTE: The panel is shown “ghosted” on the image to allow localization of the screw.**

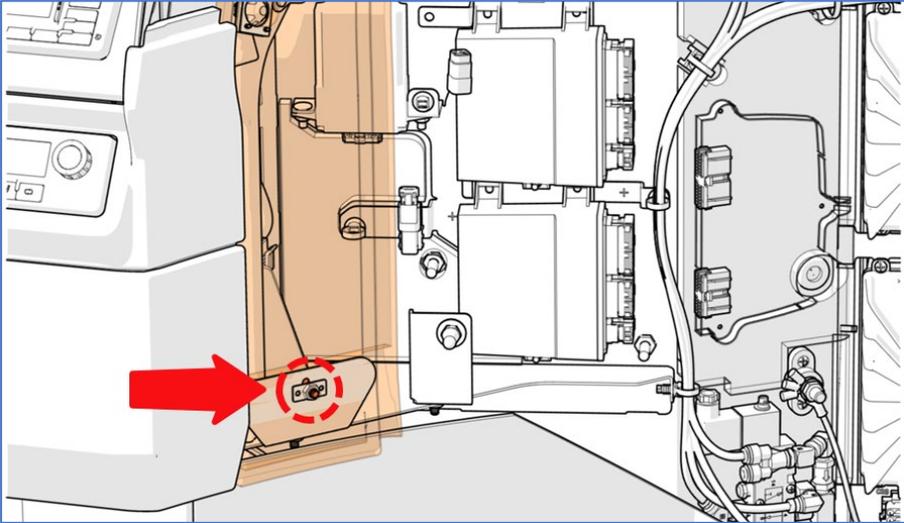


FIGURE 23

11. To remove the panel, first, remove the two (2) screws identified on the images below.

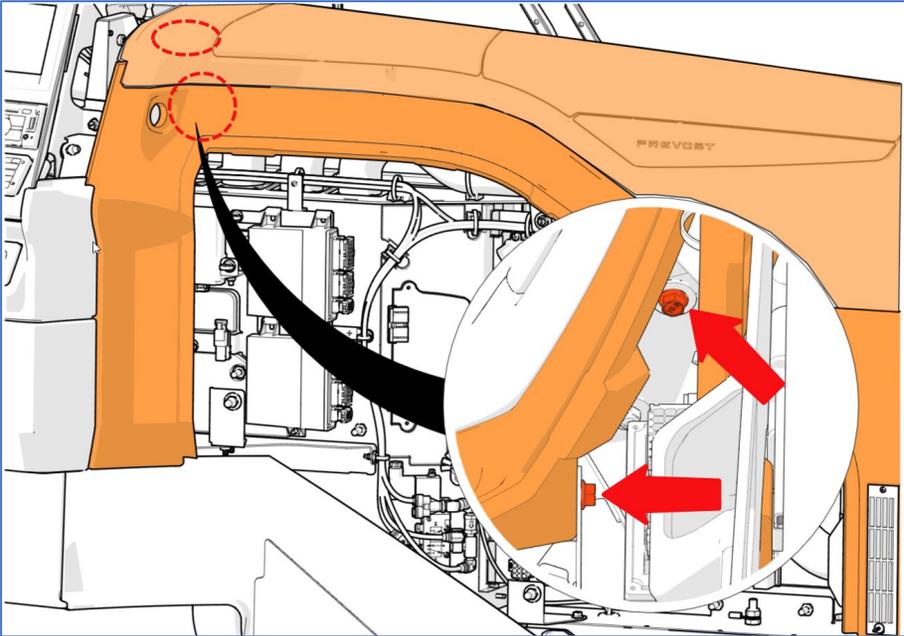


FIGURE 24

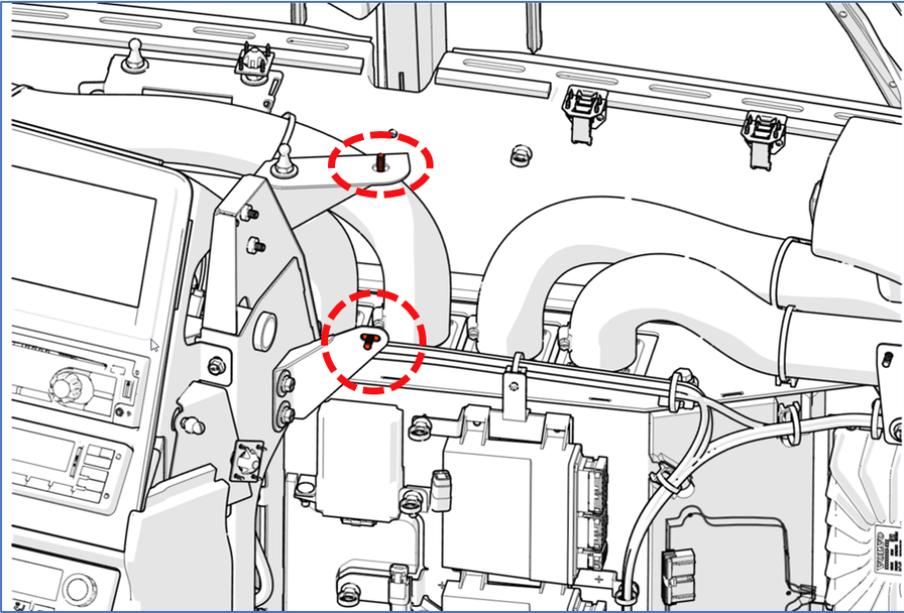


FIGURE 25: WITH PANEL GHOSTED TO HELP LOCATE THE POSITION OF THE SCREWS

12. To remove the panel, pull (unsnap) at the six (6) locations identified on the image below.

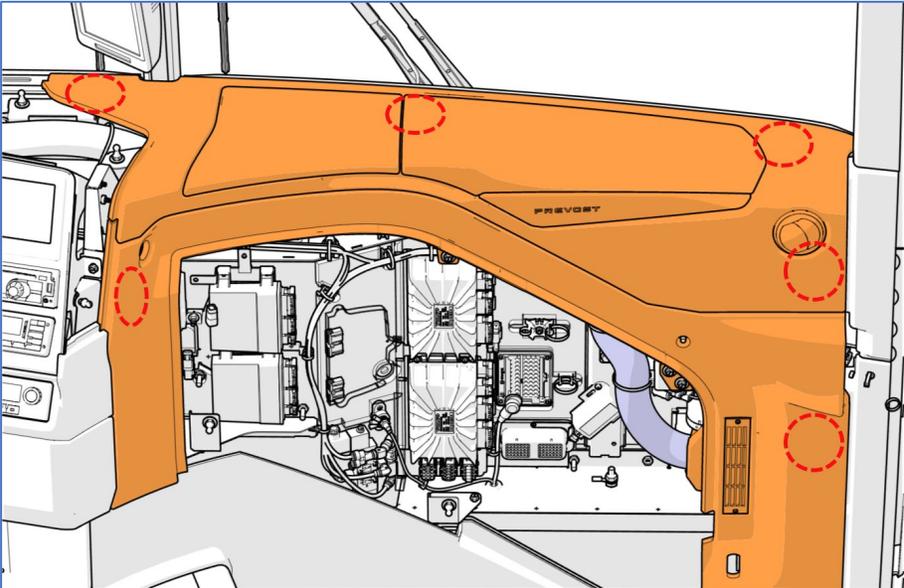


FIGURE 26

13. Once unsnap, pull with a light force to detach the panel.
14. Disconnect the register hose and the daylight sensor connector from the R.H. side of the panel.

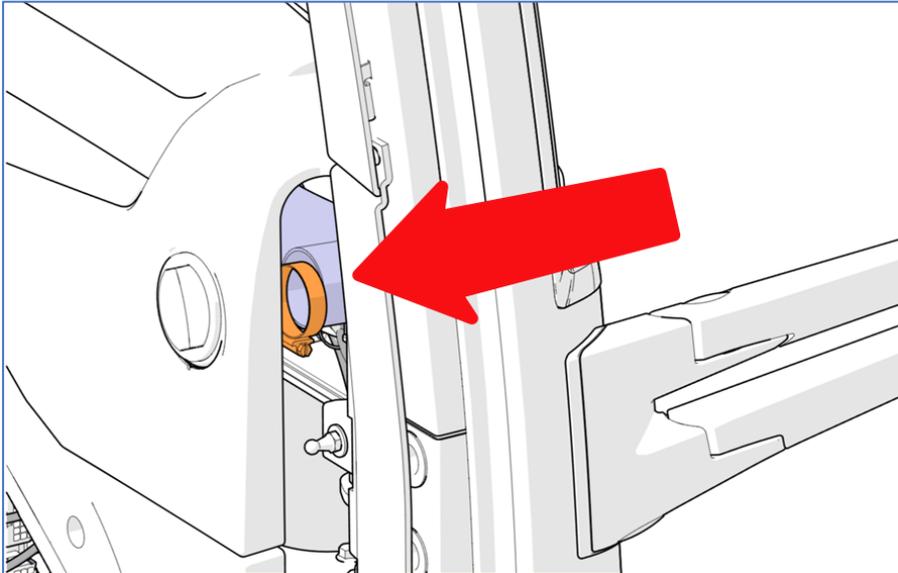


FIGURE 27

Access all our Service Bulletins on <http://techpub.prevostcar.com/en/>
Or scan the QR-Code with your smart phone

Are you a Vehicle owner?
E-mail us at technicalpublications_prev@volvo.com and type "ADD" in the subject to
receive warranty bulletins applicable to your vehicle(s) by e-mail.

