



PREVOST

**MAINTENANCE
INFORMATION**

Mi97-10



DATE: September 1997	SECTION: 23
SUBJECT: Prevost's Trailer Hitch Specifications	

APPLICATION:

Model	VIN
XL Converted coach shell Model Year: 1984 - 1997	From 2P9M33407E1001928 up to 2PCM33490W1026355 incl.
H3 Converted coach shell Model Year: 1990 - 1997	From 2P9V33402L1001030 up to 2PCV33493W1012126 incl.

DESCRIPTION

Your vehicle may be equipped with a **Prevost's** factory installed trailer hitch which has been designed to meet SAE J684, class 4 specifications. The hitch can pull a maximum gross trailer weight of 10,000 Lbs and can support a maximum tongue weight of 1000 Lbs at 8 inches or less from coupling receiver.

Warning: The above mentioned specifications must always be followed.

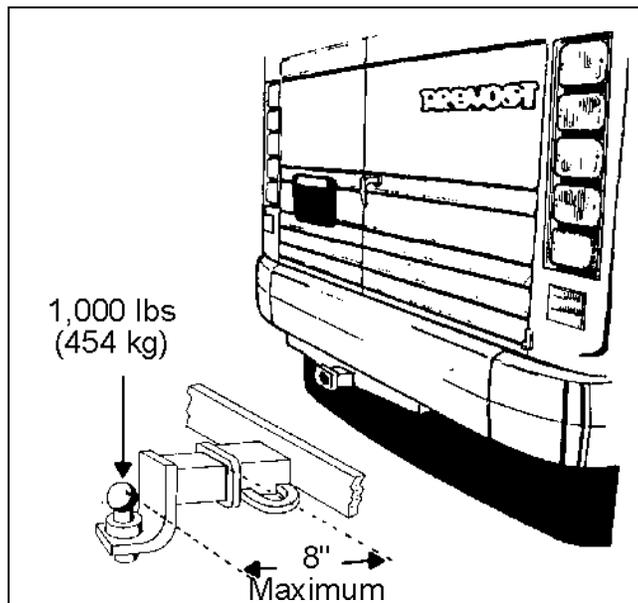


FIGURE 1: TRAILER HITCH

23007

1. Install sticker provided with this bulletin as per figures 2 and 3.

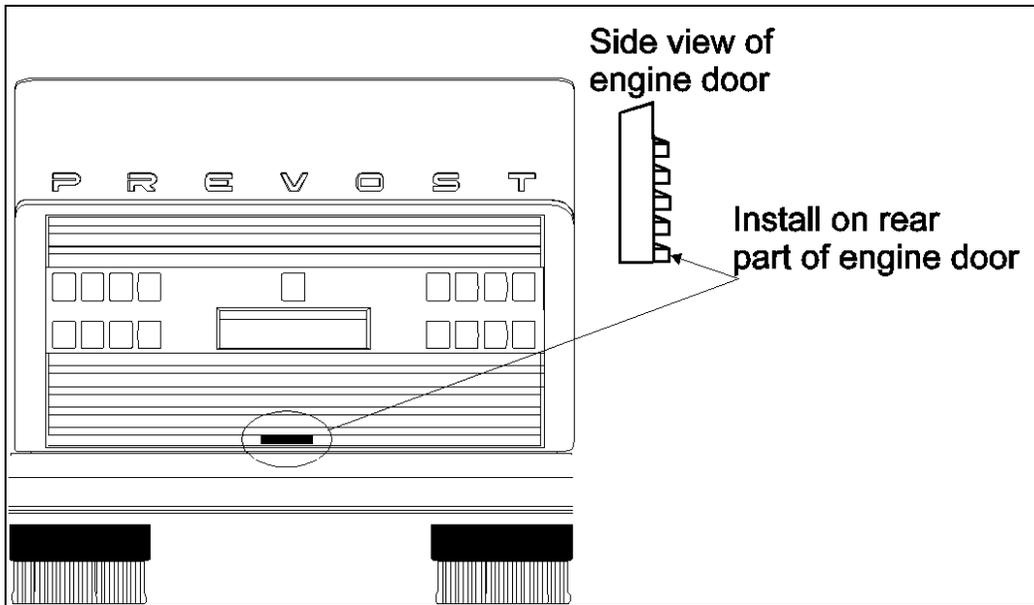


FIGURE 2: REAR SIDE OF H3 CONVERTED COACH SHELL

23124

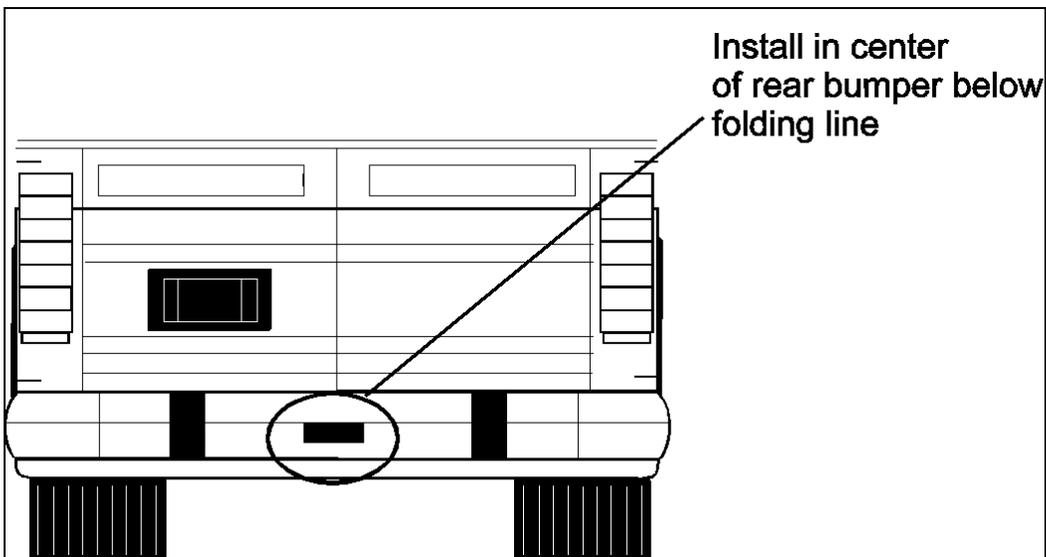


FIGURE 3: REAR SIDE OF XL CONVERTED COACH SHELL

23125

WARNING: Pulling a trailer weighing more than the recommended maximum gross weight may cause engine and transmission overheating, and also possible hitch failure.

Pulling a trailer over long distances is considered as a "severe operating condition" for the vehicle and therefore, power plant requires more frequent servicing.

Warranty could not be applicable if these specifications are not respected.