


PREVOST

WARRANTY BULLETIN

WB15-25

DATE :	MAY 2015	SECTION :	12 - Brakes
EXPIRATION:	MAY 2017		
SUBJECT :	POSSIBLE INTERFERENCE BETWEEN CLAMP AND SHOCK ABSORBER		

APPLICATION

NOTICE TO SERVICE CENTERS	
<i>Verify vehicle eligibility by checking warranty bulletin status with SAP or via ONLINE WARRANTY SYSTEM available on Service / Warranty tab of Prevost website.</i>	
Model	VIN 
H3-41, H3-45 coaches Model Year :2015	The following vehicles: 2PCH33492FC712788, 2PCH33494FC712789 2PCH33490FC712790,2PCH33492FC712791 2PCH33492FC712810
X3-45 coaches Model Year : 2015	2PCG3349XFC735795
X3-45 Commuter Model Year : 2015	4RKG33491F3737000
<p>This bulletin does not necessarily apply to all the above-mentioned vehicles, some vehicles may have been modified before delivery. The owners of the vehicles affected by this bulletin will be advised by a letter indicating the Vehicle Identification Number (VIN) of each vehicle concerned.</p>	

DESCRIPTION

On the vehicles affected by this bulletin inspect the clamp retaining the brake hose supports to make sure it does not contact with the shock absorber.

MATERIAL

No parts are required for this bulletin.

PROCEDURE



DANGER

Park vehicle safely, apply parking brake, stop engine and set battery master switch(es) to the OFF position prior to working on the vehicle.

1. On each side of the vehicle, make sure that the screw housing on the clamps is not close to the shock absorber. If it is, slack and turn the clamps one at a time, away from the interfering region, to have the housing about horizontal.

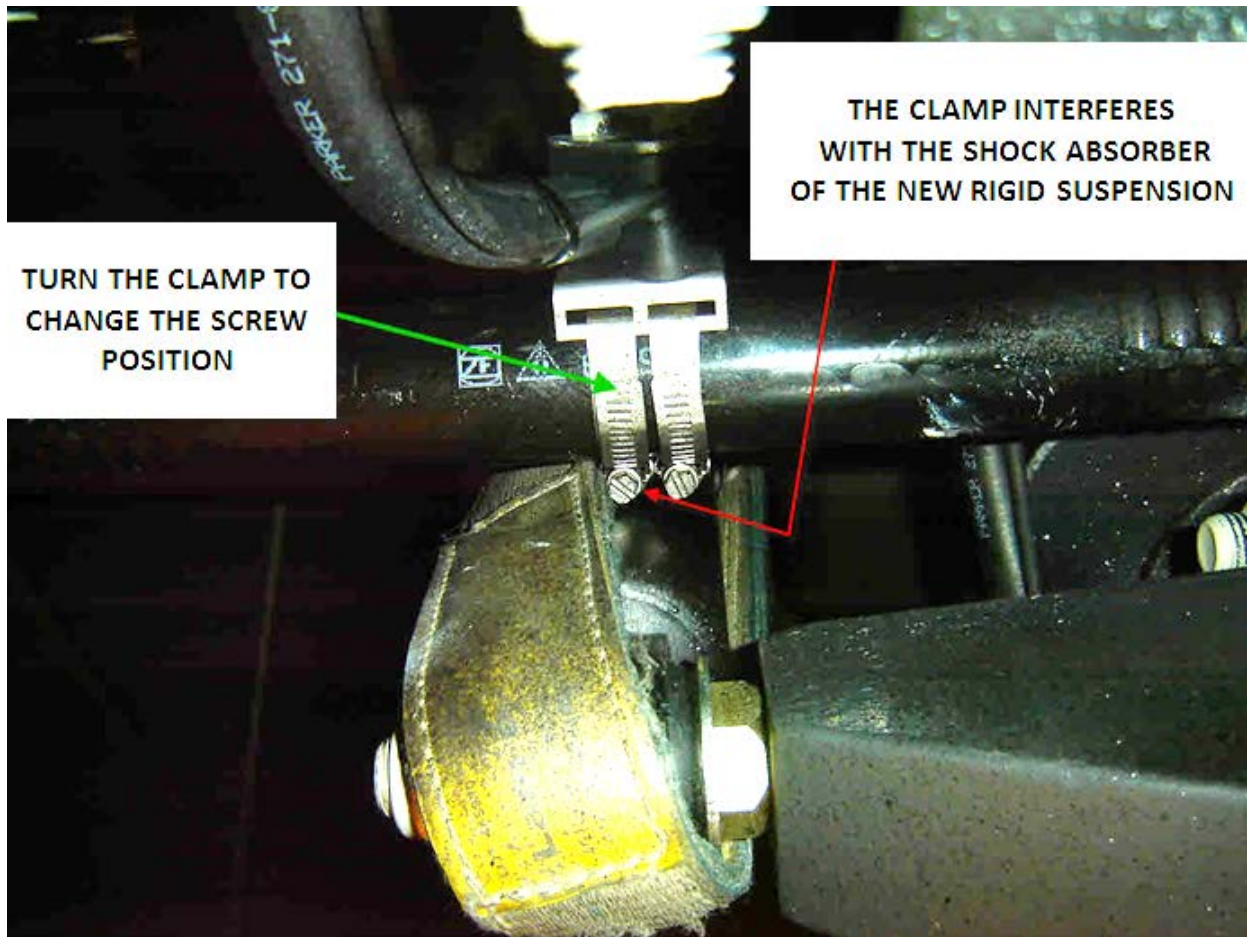


Figure 1

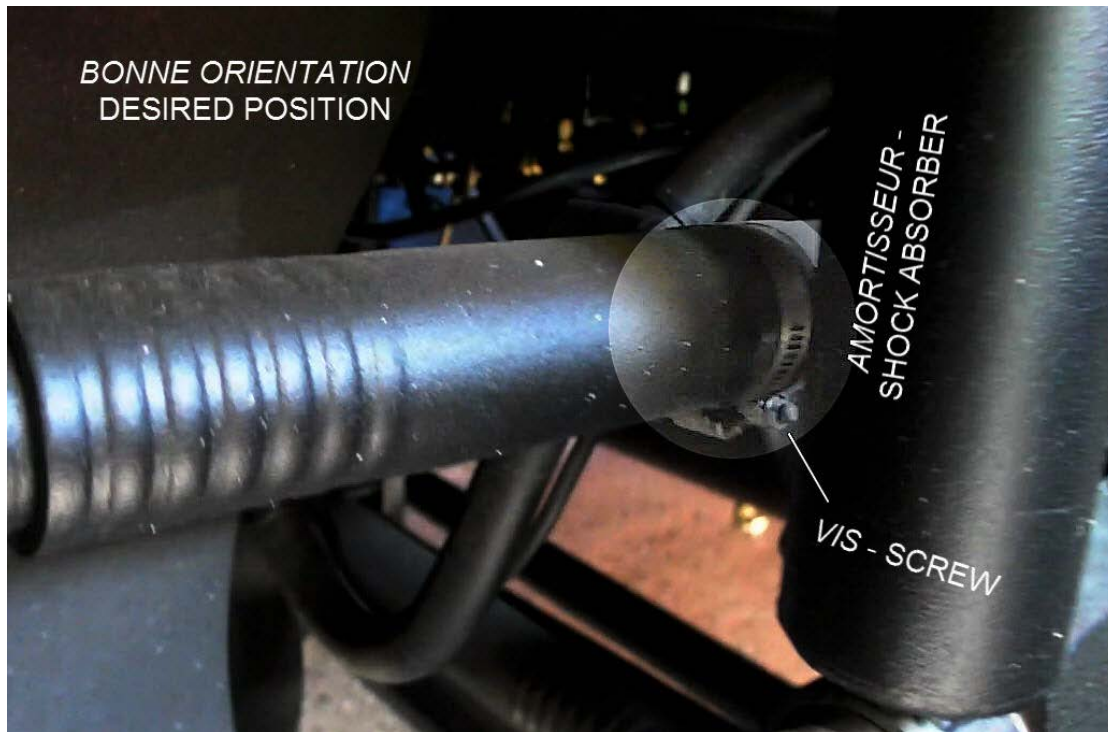


Figure 2 : DESIRED ORIENTATION

PARTS / WASTE DISPOSAL

DO NOT RETURN THE REPLACED PARTS. Discard waste according to applicable environmental regulations (Municipal/State[Prov.]/ Federal)

WARRANTY

This modification is covered by Prevo's normal warranty. We will reimburse you the parts and one hour (1.0h) of labor upon receipt of a warranty claim. Please submit claim via our Online Warranty System, available at www.prevo.com (under Service \ Warranty section). Use Claim Type: "Bulletin/Recall" and select "Warranty Bulletin WB15-25".

OTHER

VBC Bulletin	N/A
Fail Code	12.03
Defect Code	09
Syst. Cond	B
Causal Part	611488

Access all our Service Bulletins on <https://secureus5.volvo.com/technicalpublications/en/pub.asp>

or scan the QR-Code with your smart phone.

E-mail us at technicalpublications_prev@volvo.com and type "ADD" in the subject to receive our warranty bulletins by e-mail.

