

TAG AXLE REPLACEMENT

MATERIAL

Part No.	Description	Qty
121347 or 121366 or 121387	Tag axle assembly	1
IS-95125	Instruction Sheet	1
FI-95125	Feuille d'instructions	1

PROCEDURE

Warning: Park vehicle safely, apply parking brake, stop engine and set battery master switch(es) to the OFF position prior to working on the vehicle.

Prior to working under a air-suspended vehicle, it is strongly recommended to securely support the body at the recommended jacking points.

1. Remove tag axle as described in the Maintenance Manual (section 11: Rear Axle).
2. During installation of tag axle, when installing transversal radius rod, make sure that the two bolts retaining radius rod to the frame are installed as in figure 1.

Caution: If the bolts were not previously in this position (Fig. 1) and if they have not been removed for removal and installation of tag axle, they must be removed and installed as in figure 1.

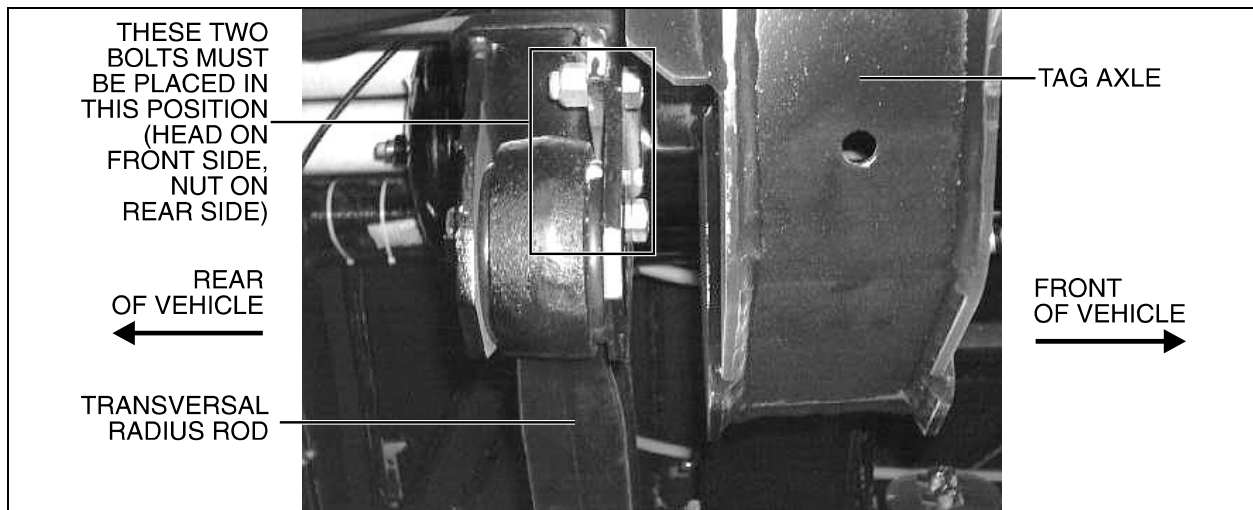


FIGURE 1: VIEW FROM RIGHT HAND SIDE UNDER TAG AXLE