

PREVOST

Instruction Sheet

IS-19921

BELT CUTTER INSTALLATION IN THE DRIVER AREA

REVISION : A THIS DOCUMENT SUPERSEDES PREVIOUS VERSION.

APPLICATION

MODEL	VIN
ALL MODELS	ALL VINS

MATERIAL

Order kit IS19921 that contains the following parts:

PART NO.	DESCRIPTION	QTY
860584	BELT CUTTER	1
7770495	3M DUAL LOCK VELCRO	0.002
683827	PREVOST SHIPPING BAG	1
FI-19921	FEUILLE D'INSTRUCTION	1
IS-19921	INSTRUCTION SHEET	1

NOTE

Material can be obtained through regular channels.

PROCEDURE



DANGER

Park vehicle safely, apply parking brake, stop engine. Prior to working on the vehicle, set the ignition switch to the OFF position and trip the main circuit breakers equipped with a trip button. On Commuter type vehicles, set the battery master switch (master cut-out) to the OFF position.

This installation sheet explains how to install the emergency belt cutter in the driver seat area on PREVH, PREVX and 9700 models.

1. Stick one piece of Velcro on the backside of the belt cutter.



Figure 1

2. Please refer to the next pages to see the appropriate belt cutter location according to the coach model you are installing the belt cutter on.

Belt Cutter Location

Prevost H series



Figure 2

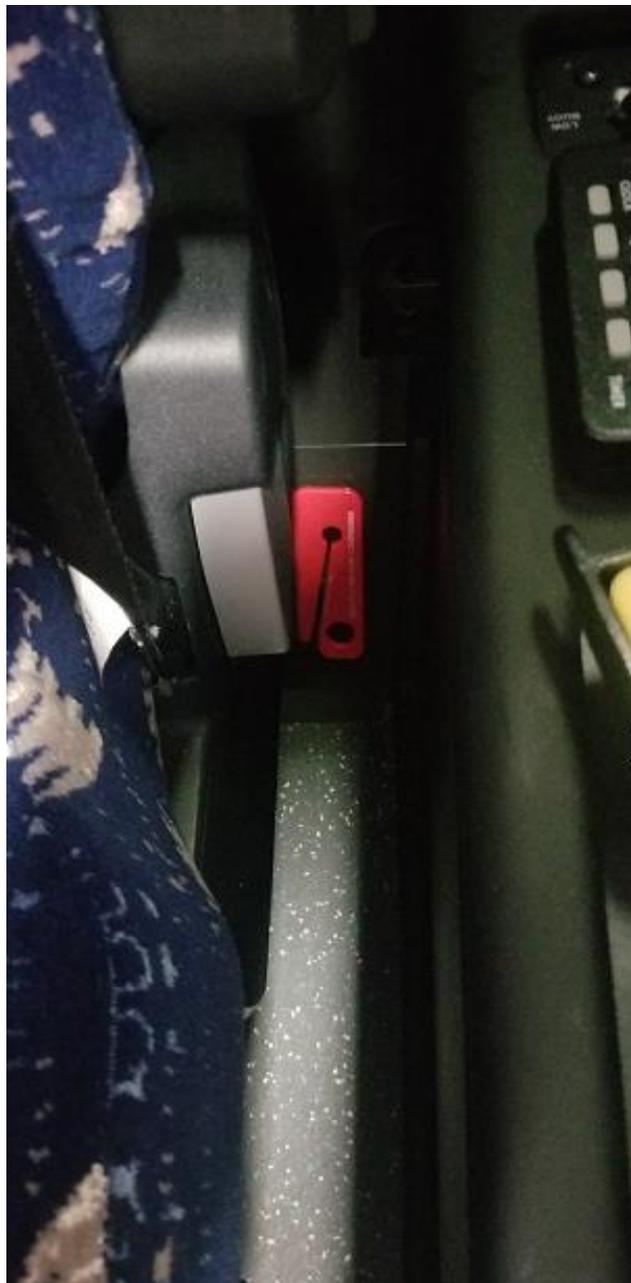


Figure 3

Belt Cutter Location

Prevost X series



Figure 4



Figure 5

Belt Cutter Location

Volvo 9700



Figure 6



Figure 7

PARTS / WASTE DISPOSAL

Discard waste according to applicable environmental regulations (Municipal/State[Prov.]/ Federal)