

Instruction Sheet

SEALING TECHNIQUE FOR EMERGENCY ROOF ESCAPES

Material

Part no	Description	Qty
68-0747	"Tremthane" sealant 10 oz (300 ml)	AR
IS-9118	Instruction Sheet	1

NOTE: Material can be ordered through regular channels.

Procedure

1. Park vehicle, apply parking brake, stop engine and set battery main disconnect switch(es) to the "OFF" position.
2. Push out ventilation hatch fully, press black tab backward, then push handle out still pressing black tab in order to release emergency hatch catch.

3. Place the 2 extremities of the rubber strip side by side. See figure 1.
4. Apply "Tremthane" sealant on the rubber strip joint.
5. Apply "Tremthane" sealant on the outline of the emergency hatch frame.
6. Allow time to dry and close emergency escape hatch.
7. Reset battery main disconnect switch(es) to the "ON" position.

CAUTION: When vehicle is parked overnight or for an extended period of time, the battery main disconnect switch(es) should be set to the "OFF" position.

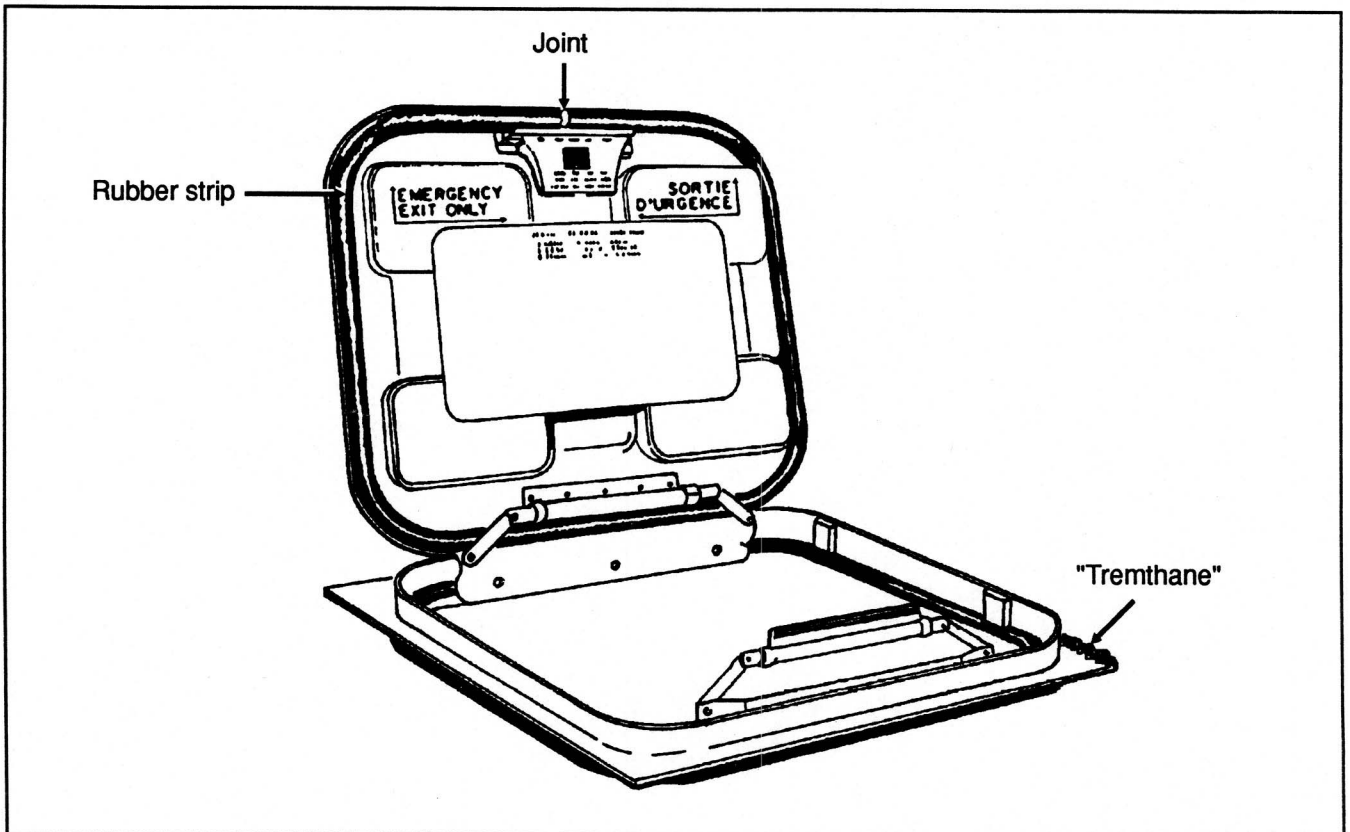


Figure 1

IS911801