

PREVOST

Instruction Sheet

IS-95084

BLAUPUNKT AMPLIFIER GROUNDING SHIELD AFTER PA REPLACEMENT (PRÉVOST #900610 BY #900795)

APPLICATION

This instruction sheet is applicable only after PA replacement (Prévost #900610 by #900795). Moreover, perform the amplifier grounding procedure only if Blaupunkt amplifier(s) is (are) installed on the vehicle.

MATERIAL

Kit # 404476 includes the following parts.

Part No.	Description	Qty
404475	Adapter (cable) (1 spare for XL-40, H3-40, H3-41 coaches)	2
IS-95084	Instruction Sheet	1
FI-95084	Feuille d'instructions	1

PROCEDURE

Warning: Park vehicle safely, apply parking brake, stop engine and set battery master switch(es) to the OFF position prior to working on the vehicle.

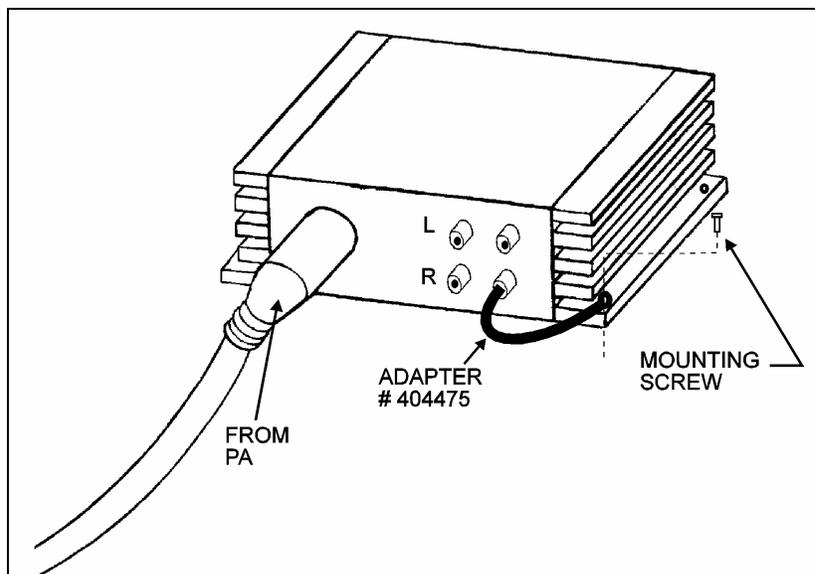


FIGURE 1: BLAUPUNKT AMPLIFIER

23094


H3 VEHICLES

The amplifier(s) is (are) located above the driver's compartment and before forward L.H. parcel rack (Fig. 2).

1. From driver's compartment, locate dome light panel (Fig. 2).
2. Remove four snap caps and retaining screws from dome light panel, remove panel and let hang by the wires.
3. Repeat step #3 for each amplifier. Remove forward R.H. mounting screw (Fig. 1). Install proper adapter extremity (Prévost #404475) through the amplifier mounting screw. Connect other extremity to the amplifier.

Note: Two amplifiers are installed on H3-45 vehicles and one amplifier is installed on H3-40 and H3-41 vehicles. Consequently the kit for H3-40 and H3-41 vehicles includes a spare adapter.

4. Make sure that cables are properly connected to the amplifier.
5. Reinstall dome light panel (Install the retaining screws and the four snap caps).

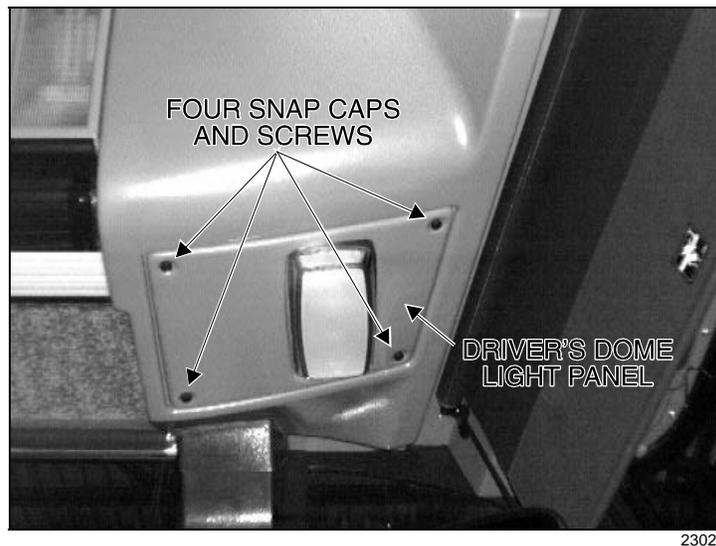

**FIGURE 2: - DOME LIGHT PANEL
AMPLIFIER(S) LOCATION ON H3 COACHES**

XL VEHICLES

On XL-40 coach (one) amplifier is provided and located underneath dashboard at driver's feet. On XL-45 coach (two) amplifiers are provided and they are located inside forward L.H. parcel rack (behind driver).


On XL-40 coach: Remove the "Phillips-head" screws retaining the amplifier protector. Remove protector (Fig. 3).

On XL-45 coach: Remove the "Phillips-head" screws (Fig. 4) retaining the amplifier plastic cover. Remove cover.

1. Repeat step #1 for each amplifier. Remove forward R.H. mounting screw (Fig. 1). Install proper adapter extremity (Prévost #404475) through the amplifier mounting screw (Fig. 1). Connect other extremity to the amplifier.


Note: Two amplifiers are installed on XL-45 coaches and one amplifier is installed on XL-40 coaches. Consequently the kit for XL-40 vehicles includes a spare adapter.

2. Make sure that cables are properly connected to the amplifier.
3. Reinstall amplifier protector (XL-40 coach) or the amplifier plastic cover (XL-45 coach).

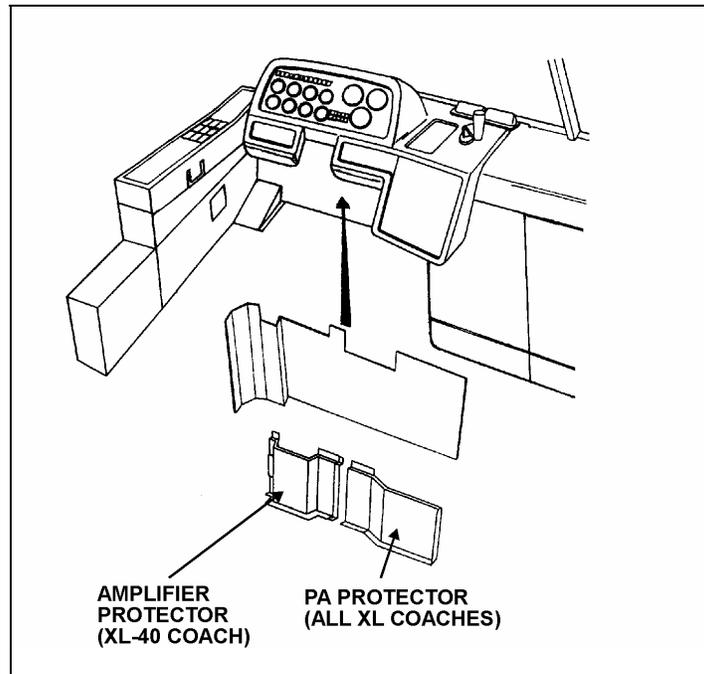

23046

**FIGURE 3: DASHBOARD -
AMPLIFIER LOCATION ON XL-40 COACHES**

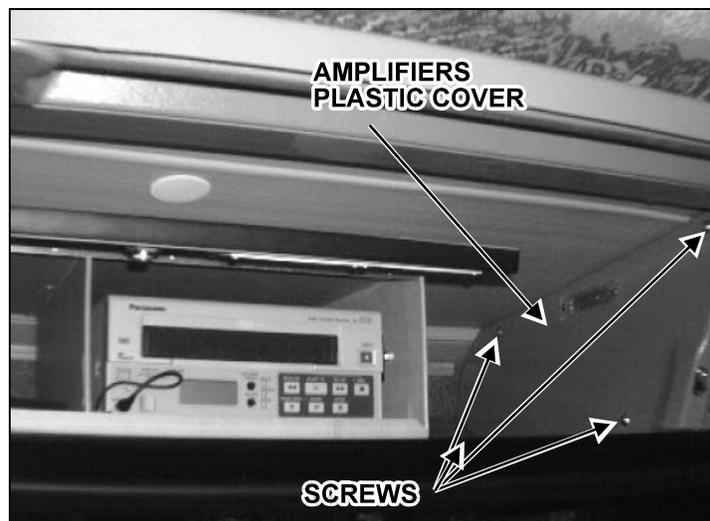

23047

**FIGURE 4: INSIDE FORWARD L.H. PARCEL RACK (BEHIND DRIVER) -
AMPLIFIERS LOCATION ON XL-45 COACH**