# PREVOST

# Warranty Bulletin

97-05

Date: March 1997

Section: 22

Subject: THERMOSTAT RELOCATION

Application:

Model	VIN PREVOST CAR INC.	
H3-41, H3-45 and VIP-45 Vehicles	From 2PCH3349XV1011779 up to 2PCH3349XV1011846 in	incl.
Model Year: 1997	except 2PCH33494 <u>V</u> 101 <u>1826</u> and 2PCH33496 <u>V</u> 101 <u>1827</u>	<u>7</u>

## **DESCRIPTION**

On the above-mentioned vehicles, the air intake duct thermostat located in the HVAC compartment is relocated in order to get a better temperature reading.

#### **MATERIAL**

Kit #064507 includes the following parts:

Part No.	Description	Qty
373444	Thermostat, with bracket and connector	1
064506	Extension wire	1
500641	Screw TC bdg Ph ZP 3/4" - 8	2

**Note**: Material can be obtained through regular channels.

#### **PROCEDURE**

**Warning:** Park vehicle safely, apply parking brake, stop engine and set battery master switch(es) to the OFF position prior to working on the vehicle.

1. Open the HVAC compartment door (refer to fig. 1).

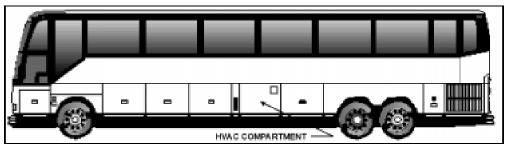


FIGURE 1: H3-45

22106

2. Using a hollow drill, drill a 1 5/8" hole in the center of the air intake duct. Enlarge the hole if needed to insert the thermostat (Prévost #373444). Secure using two 3/4" - 8 screws (Prévost #500641) and apply silicone if necessary for sealing (refer to fig. 2).



FIGURE 2: THERMOSTAT INSTALLATION IN HVAC COMPART. 22107

- 3. Disconnect C151 connector from wire of former thermostat. Connect C151 connector to the specified connector of extension wire (Prévost #064506) and the remaining connector to the thermostat. Cover the extension wire with a protective sheath.
- 4. Secure the thermostat connectors using a tie-cable (tie-wrap), use a clamp and a screw to secure the extension wire (refer to fig. 3).

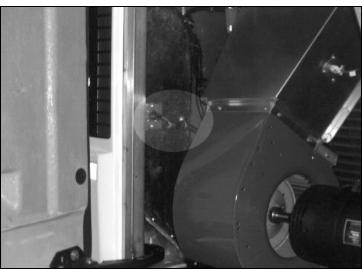


FIGURE 2: THERMOSTAT INSTALLATION IN HVAC COMPART. 22108

### **WARRANTY**

This modification is covered by the manufacturer's normal warranty. We will reimburse you the parts and half an hour (0.5) of labor upon receipt of a completed A.F.A. form on which you must specify as per "Warranty Bulletin 97-05".

**Expiration date: March 1998**