
OLD STYLE

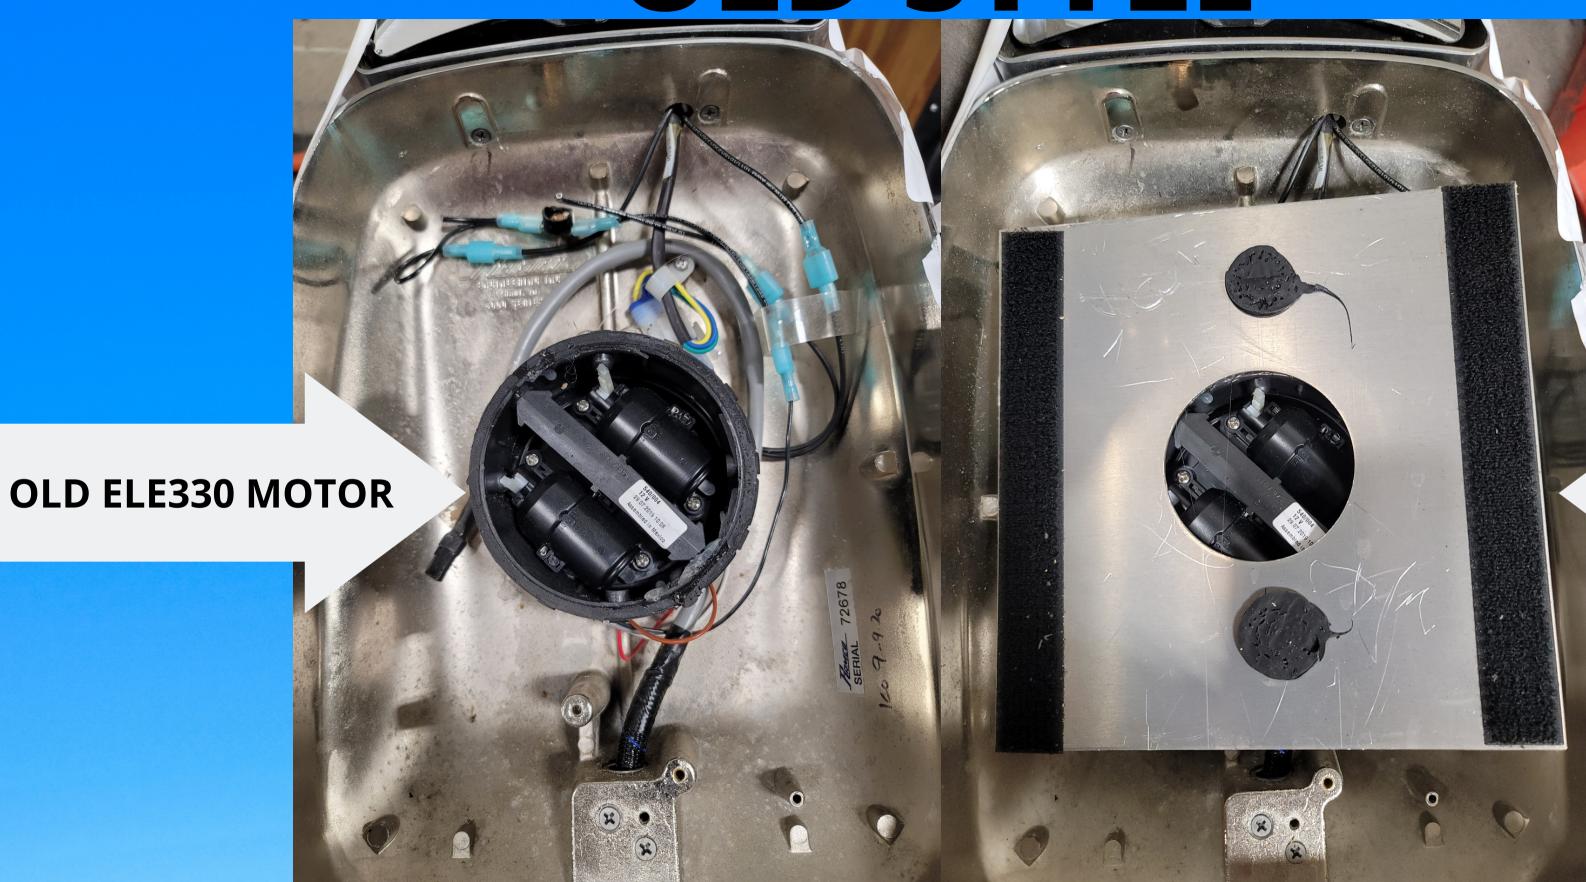


OLD PLATE W/ VELCRO


This new style motor and snap ring assembly process eliminates the need for the aluminum plate and silicone.

NEW BOD070 SNAP RING NEW ELEO70 MOTOR


The snap ring is placed onto the rim of the motor until all clips are fully engaged.

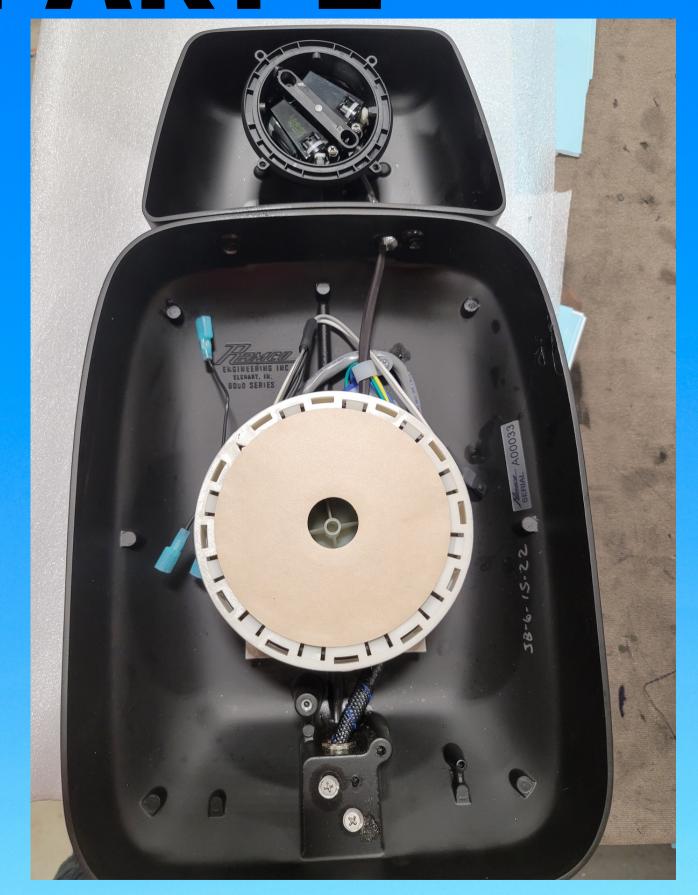

The circle by the arrow on the snap ring should line up with the hole that has the flat part on the inside. The three circles on the inside of the snap ring only work in one configuration as well, so you will not be able to improperly install it easily.

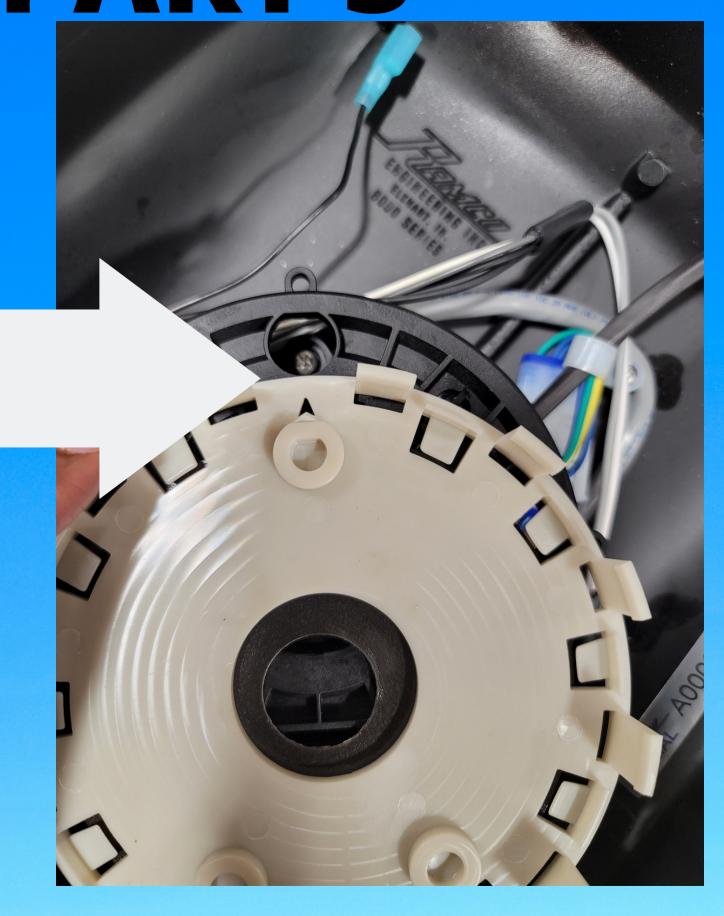

The flat glass is then adhered to the adhesive pad on the snap ring after removing the brown paper which will expose the adhesive.

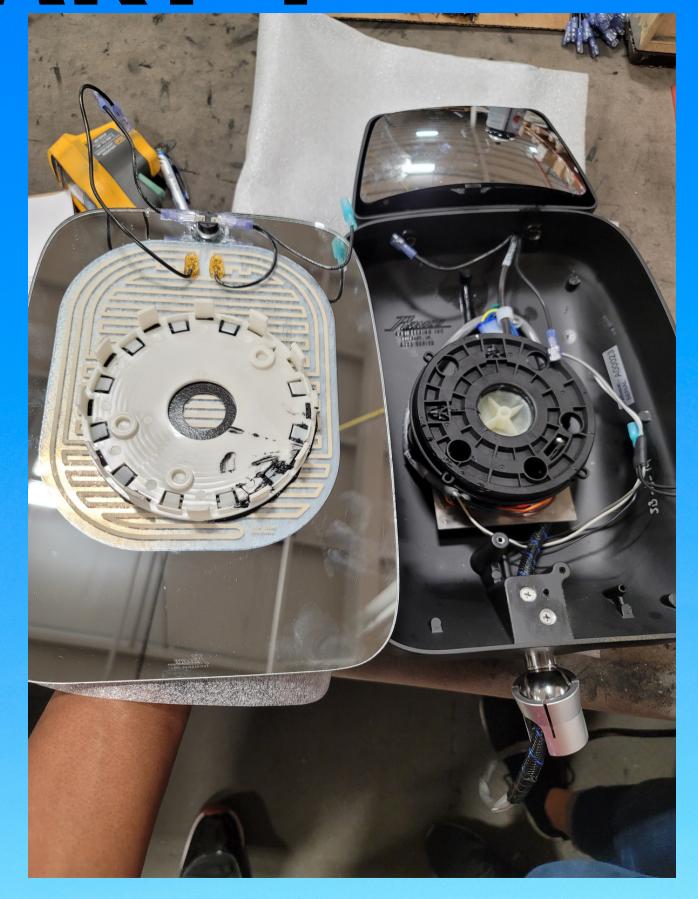

Until new part numbers are able to be created by Prevost, Ramco will mark the bottom corner of the convex skirt so that it is easily identified in the field without having to remove the mirror.

