

**PREVOST FLIP-DOWN OR FIXED VIDEO MONITOR REMOTE CONTROL  
OPERATING INSTRUCTIONS****MATERIAL**

Kit #068213 includes the following parts:

Part No.	Description	Qty
564183	Control, Remote Monitor	1
IS-10900	Instruction Sheet	1
FI-10900	Feuille d'instructions	1

**PROCEDURE****DANGER**

Park vehicle safely, apply parking brake, stop engine and set battery master switch(es) to the OFF position prior to working on the vehicle.

1. If the monitor turns to black screen or black and white picture, see picture 1 and picture 2, it could be fixed by resetting the parameters via the remote control.




PICTURE 1




PICTURE 2

#### REMOTE CONTROL



2. Aim the remote control at monitor receiver located on monitor bottom right corner  and press the “menu” button . the menu will display on the screen, refer to the following picture:

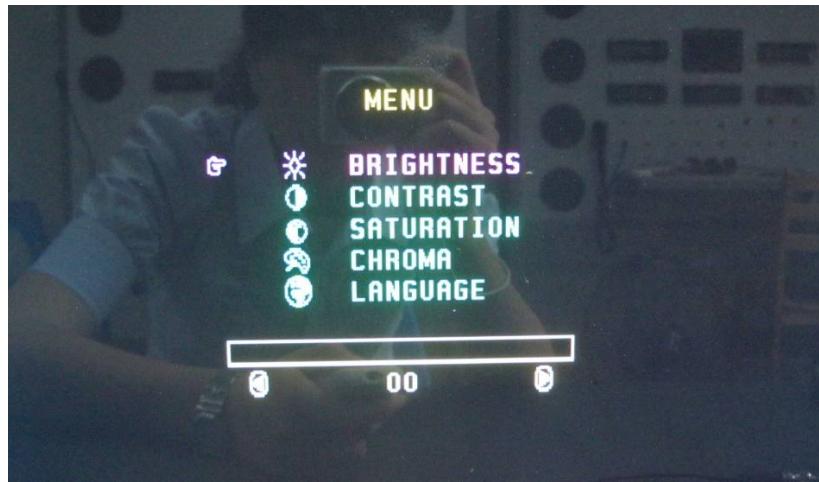

3. Press "up/down" buttons  to scroll through the available settings, check the setting of ("brightness, contrast, saturation, chroma"). The normal setting value should be 50 for each setting.



4. If the setting is not correct, then press the "left /right" buttons  to adjust the setting value to 50, then the normal picture will display on the screen.



5. Picture effect can be selected if the picture is too bright or too dark after resetting is done. Press



"picture mode" button  to choose between modes "NATURAL, INDIVIDUAL or SOFT".