



## PC2150/31 SPECIFICATIONS


### BATTERY DESIGN

- Absorbent glass mat (AGM) technology
- 12V battery pure lead VRLA
- BCI Group 31 footprint
- Rugged construction
- 3/8 in. (9.5 mm) corrosion-free stud terminal; brass SAE terminal optional
- Can be mounted in any orientation except inverted. In order to meet group 31 specifications (hold-down), battery must remain upright
- Suitcase lifting handle
- US DOT and IATA certified non-spillable
- Shipped fully charged - just install and go!
- Container and cover made from oil resistant plastic
- Optional metal jacket

### PERFORMANCE FEATURES


- PHCA: 2,150A at 80°F (27°C); for 5 seconds
- PCCA: 1,500A at 0°F (-18°C); for 5 seconds
- CCA: 1,150A at 0°F (-18°C)
- CA/MCA: 1,370A at 32°F (0°C)
- HCA: 1,545A at 80°F (27°C)
- Reserve capacity: 205 minutes
- Short circuit current: 5,000A
- Deep cycling capability: 400 at 80% DOD
- Design life: 12 years
- Typical service life: 6 to 8 years

### PHYSICAL CHARACTERISTICS

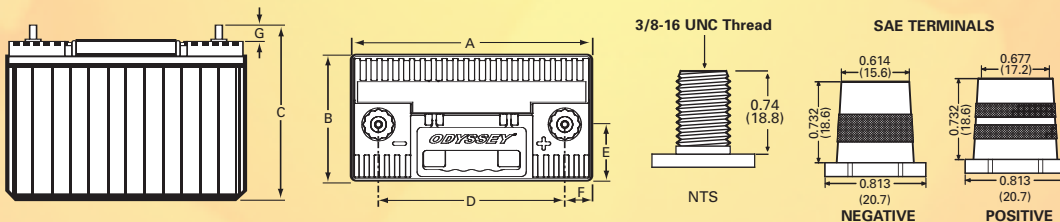

Nominal Dimensions, in. (mm)		A	B	C	D	E	F	G	Weight
WITHOUT		13.00	6.80	9.41	10.075	3.03	2.12	0.882	77.8 lb
METAL JACKET		(330.2)	(172.7)	(239.0)	(255.9)	(77.0)	(53.8)	(22.4)	(35.3 kg)
WITH		13.055	6.890	9.45	10.075	3.06	2.15	0.882	80.7 lb
METAL JACKET		(331.6)	(175.0)	(240.0)	(255.9)	(77.7)	(54.6)	(22.4)	(36.6 kg)

Dimensions ± 0.021 in. (± 0.533mm)

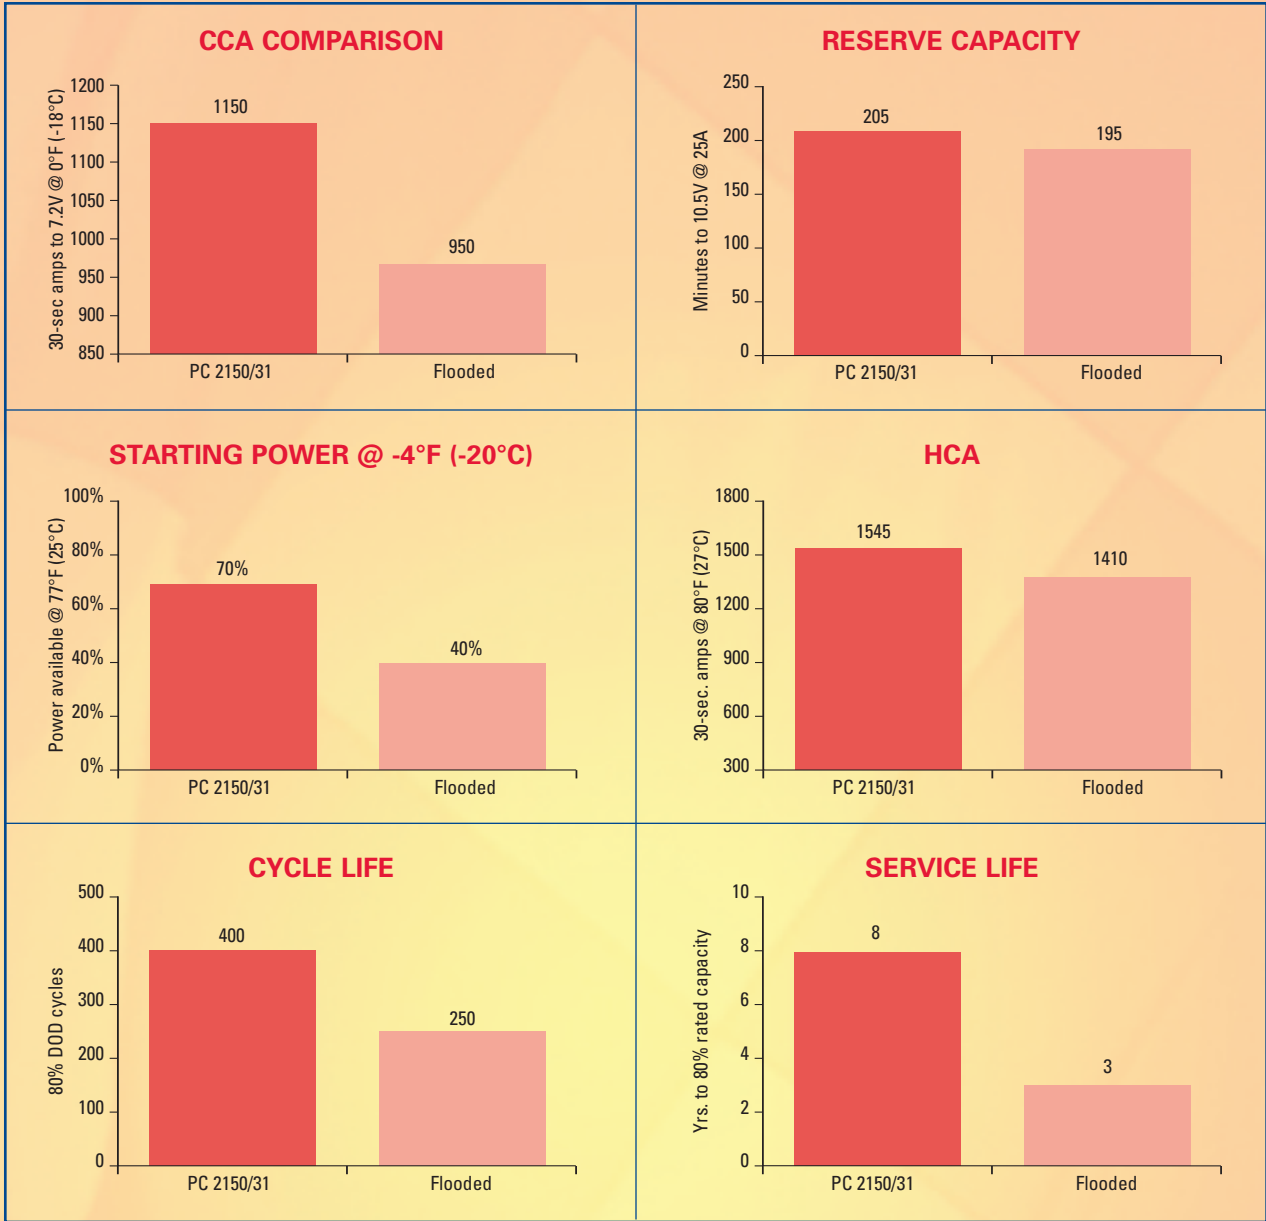

**HIGH RATE DISCHARGE AT 77°F (25°C)**

5 sec.	10 sec.	15 sec.	20 Sec.
2,150A	1,985A	1,800A	1,750A

**EXTENDED DISCHARGE AT 77°F (25°C) TO 10.02V**

5 min	15 min	1 hr	3 hr	5 hr	10hr	20hr
437.0A	216.0A	73.0A	28.1A	17.8A	9.2A	5.0A



**Regional Sales**

**EnerSys Energy Products Inc.**  
 617 North Ridgeview Drive,  
 Warrensburg,  
 MO 64093-9301, USA  
 Tel: +1-660-429-2165  
 Fax: +1-660-429-1758

**EnerSys Limited**  
 Rake Lane,  
 Clifton Junction,  
 Manchester M27 8LR UK  
 Email: odyssey.sales@uk.enersys.com  
 Tel: +44 (0)161 727 3952  
 Fax: +44 (0)161 727 3805

**EnerSys Australia Pty Ltd**  
 7 Walker Place,  
 Wetherill Park, NSW,  
 Australia 2164  
 Tel: + 61 (0) 29756 1870  
 Fax: + 61 (0) 29757 4537  
 Toll-free: 1-800-550-153

Distributed by:

**Website: [www.odysseyfactory.com](http://www.odysseyfactory.com)**

Printed in USA  
 © 2006 EnerSys. All rights reserved.  
 Trademarks and logos are the property of EnerSys  
 and its affiliates unless otherwise noted.