


CC1 (BLACK)




BACK OF CONNECTOR
PREVOST PART 563227
SOCKET TERMINALS 562482
SECONDARY LOCK 563228

Converter interface

Front junction box

CC2 (GREY)



BACK OF CONNECTOR
PREVOST PART 563226
SOCKET TERMINALS 562482
SECONDARY LOCK 563228





INPUTS

TELL TALE #1
TELL TALE #2

TELL TALE #3
TELL TALE #4

TELL TALE #5

CC1



CC2

OUTPUTS

WAKE UP IGNITION
NEUTRAL
REVERSE GEAR
PARK BRAKE


IGNITION
ENGINE RUN

SLIDE OUT RETRACTING (front)
SLIDE OUT EXTENDING (front)
SLIDE OUT RETRACTING (rear)
SLIDE OUT EXTENDING (rear)


TRANSMISSION SPEED

VEHICLE SPEED

TO PAGE 23.2 AND 23.3

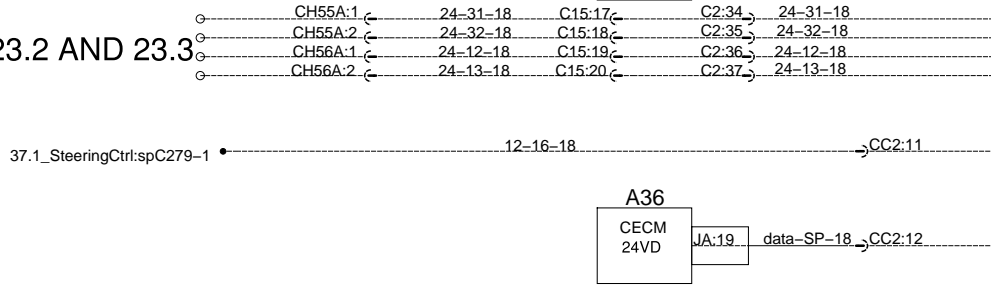

TYPICAL CIRCUIT

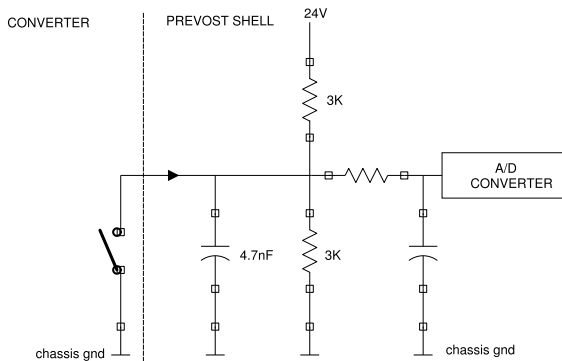

INPUT SPECIFICATION

Active state (input contact closed):

Sourcing current : 8mA
Maximum allowed voltage drop across contact: 3V

Inactive state(input contact open):

Voltage on input:12V
Maximum allowed leakage current across contact: 3mA

OUTPUT SPECIFICATION

Active state

Maximum current: 1A
Minimum output voltage: 22.5V

Inactive state

Open circuit voltage: 8V
Leakage current: 0.8mA

TYPICAL CIRCUIT

