

PREVOST

Instruction Sheet

IS-98103

RAMCO MIRROR CONNECTOR WATERTIGHTNESS

MATERIAL

Kit #064904 includes the following parts :

Part No.	Description	Qty
562914	Seal, interface, 6 hole	2
562915	Seal, wire, 6 hole	4
562918	Plug	4
IS-98103	Instruction Sheet	1
FI-98103	Feuille d'instructions	1

Kit #064905 includes the following parts :

Part No.	Description	Qty
562916	Seal, interface, 9 hole	2
562917	Seal, wire, 9 hole	4
562918	Plug	4
IS-98103	Instruction Sheet	1
FI-98103	Feuille d'instructions	1

Note: Each kit includes enough parts to modify a set of two mirrors.

Note: Extractor tool (Prévost #682257) is necessary to carry out these instructions.

PROCEDURE

Warning : Park vehicle safely, apply parking brake, stop engine and set battery master switch(es) to the OFF position prior to working on the vehicle.

1. Remove the mirror as per Maintenance Manual, Section 18. Disconnect.
2. Note position of wires so as to replace correctly.
3. Using the extractor tool (Prévost #682257), remove the tab connectors from the connector housing. Remove receptacles from their housing.
4. Insert a male seal in the back of each connector housing.

5. Insert tab connectors and receptacles, (through wire seal), in their correct position.
6. Insert a plug (through wire seal), in the vacant hole in the connector receptacle.
7. Sandwich the interface seal between the two connector housings.
8. Close the connector.
9. Reinstall mirror as per Maintenance Manual, Section 18.

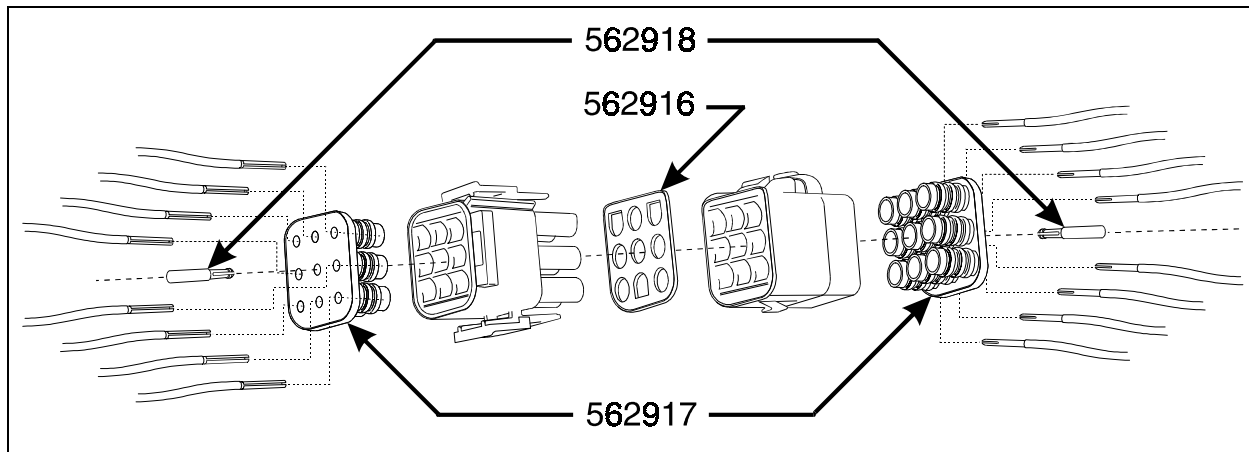


FIGURE 1: TYPICAL RAMCO MIRROR CONNECTOR SEAL INSTALLATION