
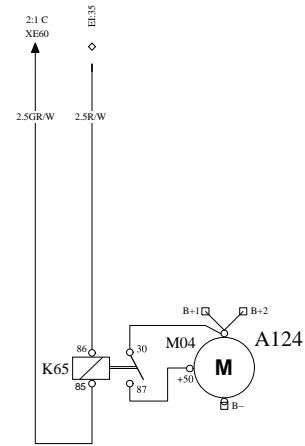


| | | | | | | |
|--|----------|--------------------|---|--------------------------|--|------------------------|
| Engineering Release Notice (ERN) | Location | Change Description | A = Added D = Deleted | W = Was | Document Release Status RELEASED | |
| D-13552-37 | | Change Description | | | Date 2007-07-17 | Modification Count |
| <ul style="list-style-type: none"> Changed the pinning for B51 and B187 to be: <ul style="list-style-type: none"> 1 5V 2 Signal 4 GND | | | | | | |
| The copying, distribution and utilization of this document as well as the communication of its contents to others without expressed authorization is prohibited. Offenders will be held liable for payment of damages. All rights reserved in the event of the grant of a patent, utility model or ornamental design registration. | | | Document Title WIRING DIAGRAM MD13 Prevost | | | |
|  Volvo Powertrain Corporation | | | Document Type PRODUCT SCHEMATICS | | | |
| | | | Owner Domain: Document Prefix | | | |
| | | | Document No 20980732 | Issue Index 04 | Volume No 01 | Page No 1(6) |

EDM-W 2000-04-01



| Symbol | Description |
|---------------|---|
| A14 | Control unit, EMS (Engine Management System) |
| A45 | Fuel conditioner (Incl. R10, B52, Y38) |
| A124 | Comp. group starter motor. Contains M04 and K65 |
| B04 | Sensor, engine speed, crankshaft |
| B05 | Sensor, engine speed, camshaft |
| B187 | Sensor, after treatment fuel pressure |
| B32 | Sensor, engine cooling fan speed (Included in A43) |
| B52 | Sensor, water level in fuel pre filter (Included in A45) |
| B118 | Sensor, oil pressure |
| B119 | Sensor, oil level and oil temp |
| B21 | Sensor, coolant temperature, engine |
| B37A | Sensor, boost temperature |
| B37B | Sensor, boost pressure (EGR Mixer position) |
| B51 | Sensor, fuel pressure |
| B54 | Sensor, crank case pressure |
| B66 | Sensor, EGR temperature |
| B84 | Sensor, air humidity (and air temp) |
| B87 | Sensor, turbo speed |
| B166 | Sensor, EGR Differential pressure (Venturi) |
| E73 | 7th Injector |
| G02 | Alternator |
| M04 | Starter motor (Included in A124) |
| J1939 | Terminating resistor, CAN 2 Bus |
| K65 | Starter motor relay (Included in A124) |
| R01 | Heater, engine preheat |
| R10 | Heater, fuel pre filter (Included in A45) |
| Y103 | Safety Valve, fuel system, AT1 |
| Y33 | Solenoid valves UI (Unit Injector) |
| Y34 | Actuator, EGR system (Lisk) |
| Y35 | Solenoid valve, engine cooling fan (Included in A43) |
| Y37 | Solenoid valve, AVU, Air valve unit (recirculation valve) |
| Y38 | Solenoid valve, WIF, fuel pre filter water draining ((Included in A45)) |
| Y39 | Solenoid valve, VCB (Volvo Compression Brake) |
| Y54 | Control unit, Volvo geometric turbo, Can based |
| X18D | Fusible link, pre heater, GND |
| X18E | Fusible link, pre heater, GND |
| X18F | Fusible link, pre heater, Supply |
| XG9 | GND Stud, engine block (close to alternator) |

VOLVO

Volvo Powertrain Corporation

Document Title

WIRING DIAGRAM

Document Type

PRODUCT SCHEMATICS

Document No

20980732

Issue Index

04

Volume No

01

Page No

5(6)

Vehicle Interface EI

| Pin | Function |
|-------|---|
| EI:1 | CAN (H) |
| EI:2 | J1708 (A) |
| EI:3 | CAN II (H) |
| EI:4 | CAN (L) |
| EI:5 | J1708 (B) |
| EI:6 | CAN II (L) |
| EI:7 | Preheater Relay Drive |
| EI:8 | IVS |
| EI:10 | Alternator I |
| EI:11 | Alternator R |
| EI:13 | Power supply for A14 |
| EI:15 | Power supply for A14 |
| EI:18 | Switch ground, coolant level |
| EI:21 | Power supply for Y37, Y38, Y39 & A43 |
| EI:22 | Power supply for external sensors (+5V) |
| EI:23 | AC compressor control |
| EI:24 | Sensor, DPF relative pressure |
| EI:25 | Power supply VGT & Pre heat relay |
| EI:26 | GND for external sensors (c/o EI:22) |
| EI:27 | GND |
| EI:28 | Signal, coolant level |
| EI:29 | Signal, Temperature after part. Filter (DPF) |
| EI:31 | GND |
| EI:33 | Y35 Ctrl. signal (GND, Low side, Fan control) |
| EI:34 | Signal, temperature upstream catalyst |
| EI:35 | Starter control |
| EI:36 | Signal, temperature downstream catalyst |
| EI:37 | Power supply for R10 |
| EI:39 | GND |

CIC #1, CAN III (Component Interface Connector)

| Pin | Function |
|--------|-------------|
| CIC1:1 | Can III (L) |
| CIC1:7 | Can III (H) |

VOLVO

Volvo Powertrain Corporation

Document Title

WIRING DIAGRAM

Document Type

PRODUCT SCHEMATICS

Document No

20980732

Issue Index


04



Volume No

01


Page No

6(6)

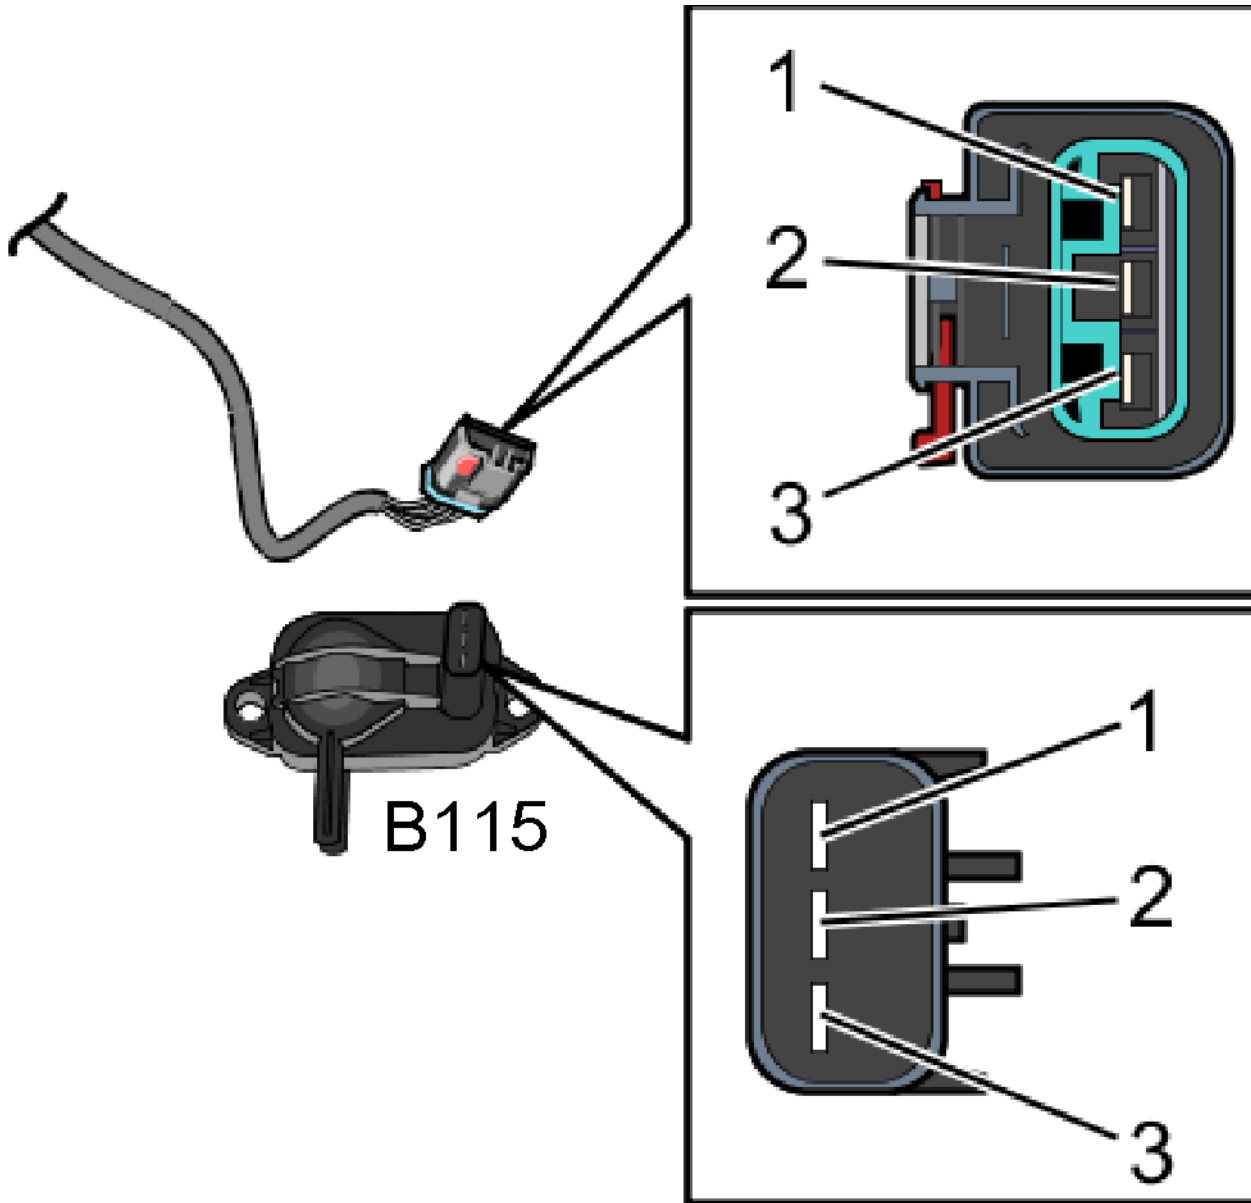

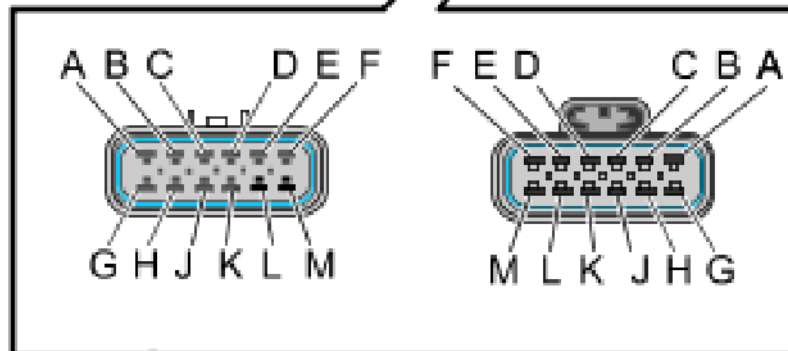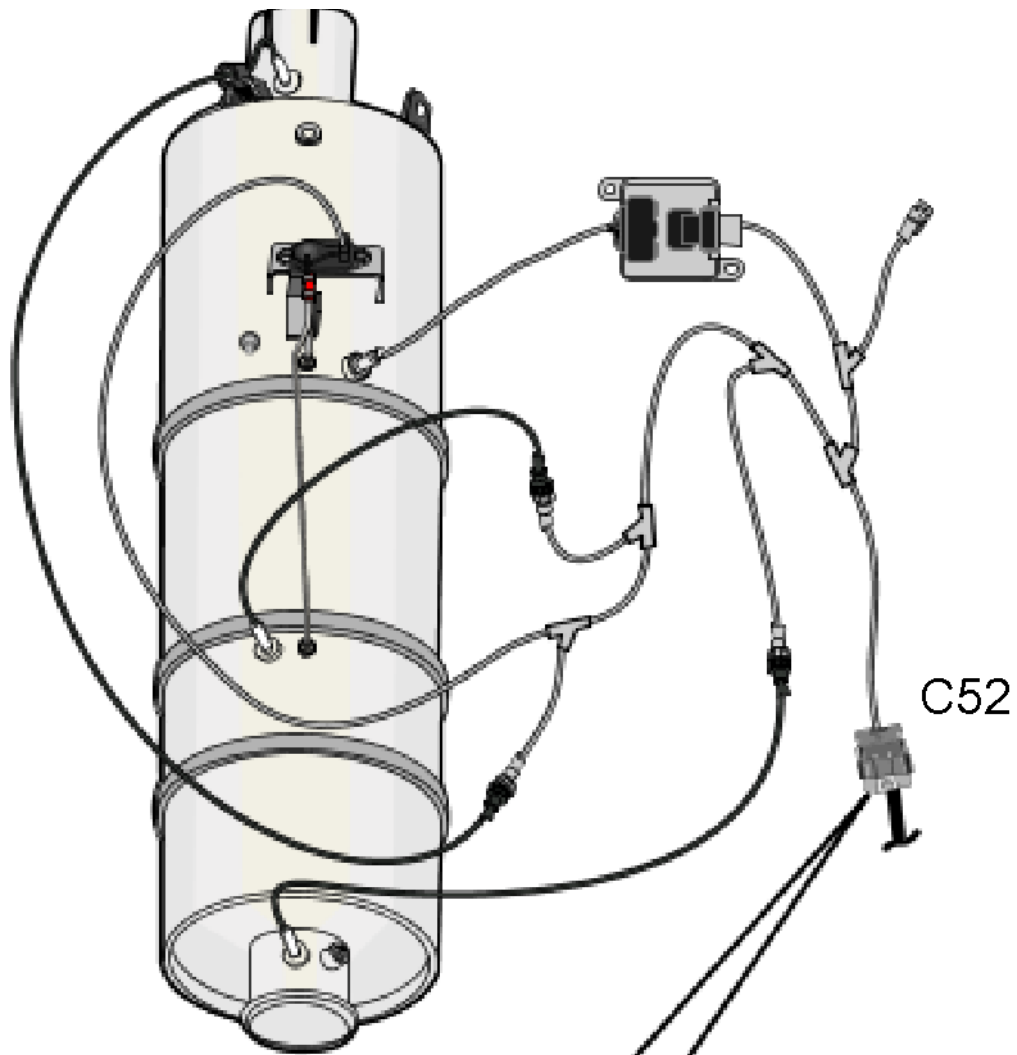

EI, Engine Interface, Pin view

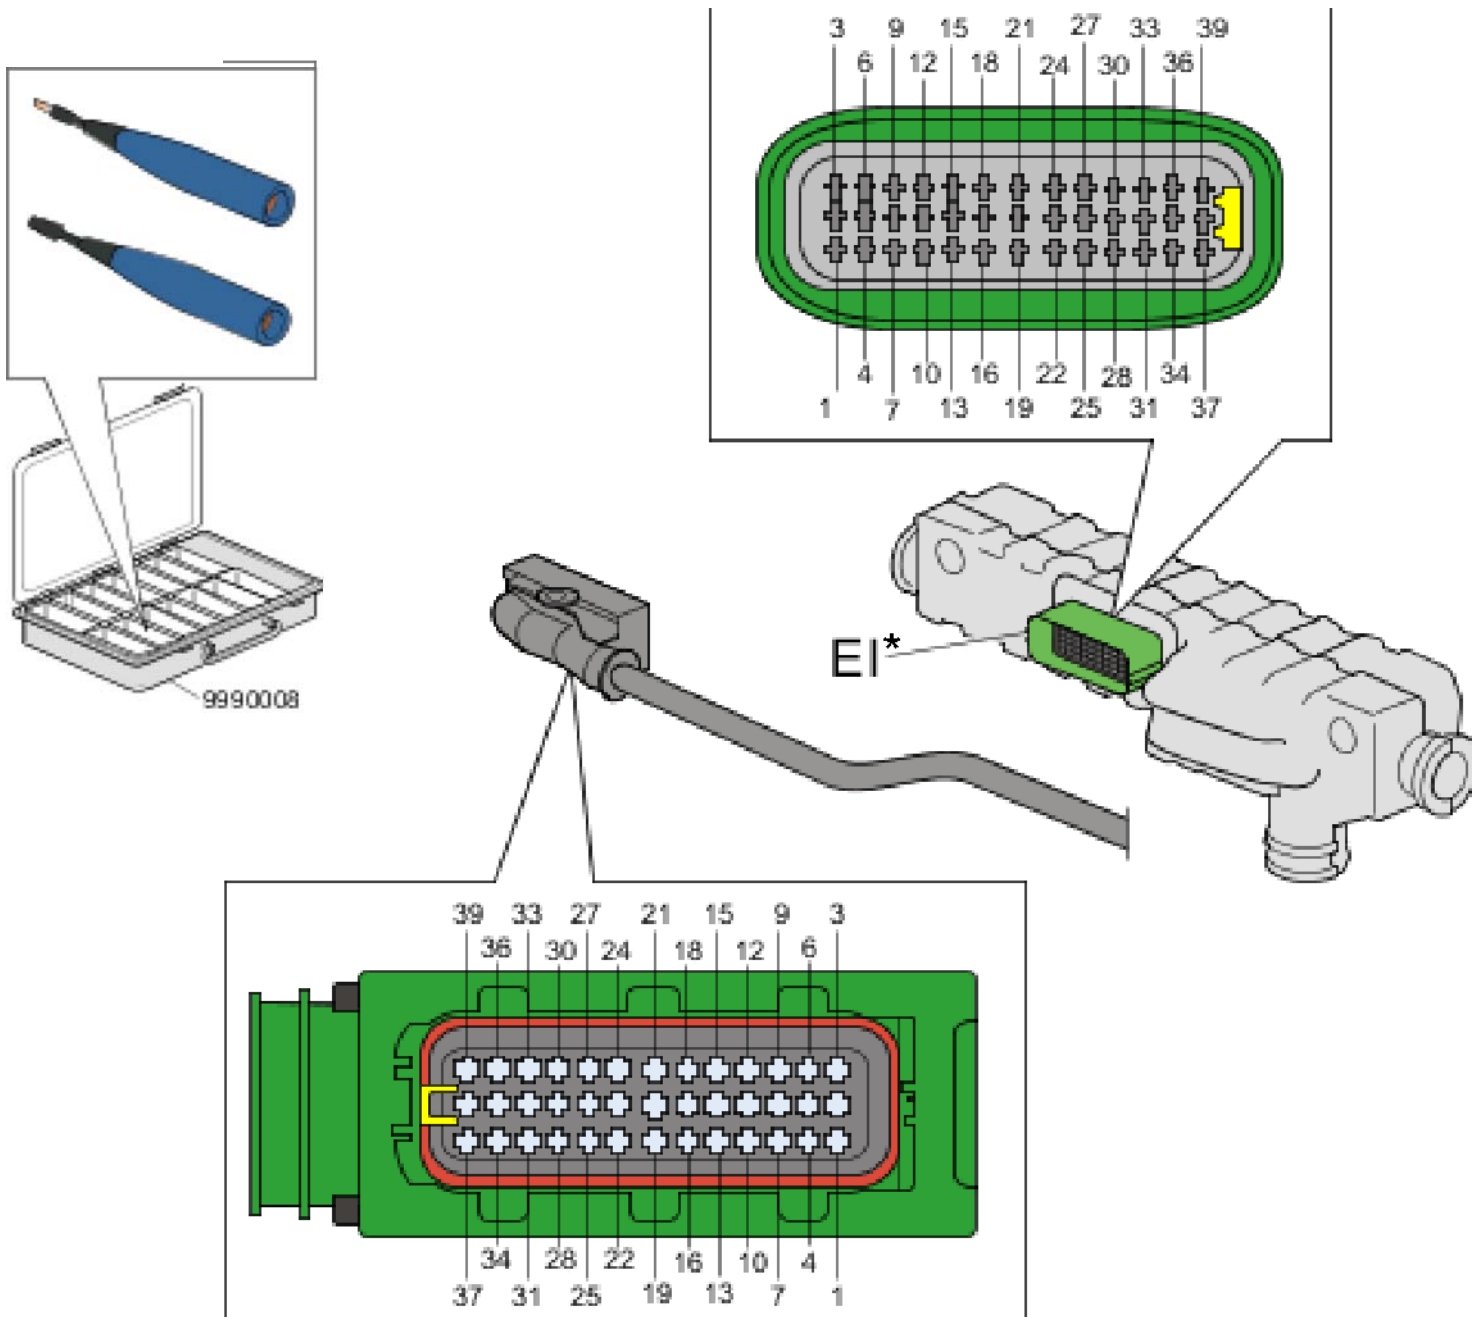

*Note: The EI connector is commonly referred to as the A82 engine interface connector

US07, A14, EECU, EA+EB, Pin view

